



New Integra Hood for Friendly Lighting. Awesome performance with quality and value from this compact 400 and 250 Watt HID flood.

Color: Bronze

Weight: 33.2 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED18
Watts	400W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	24,000
Lamp Lumens	50,000
Efficacy	107.8 LPW

Ballast Info

Type	CWA-HPF QT
Watts	3.3/3.8A
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	277V
Lamp Lumens	Input Watts
Efficacy	464W
	86%

Technical Specifications

Electrical

Photocell:

120V Twist Lock Photocell Included. Photocell is only compatible with 120V.

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Construction

Housing:

Precision die cast aluminum

Reflector:

High quality anodized aluminum

Lens:

Tempered shock resistant glass

Lens Gasket:

Molded one-piece silicone in die cast retaining groove to remain in place during relamping

Finish:

Formulated for high durability and long-lasting color

EPA:

1.3.

Other


Patents:

Pat. D547,478.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

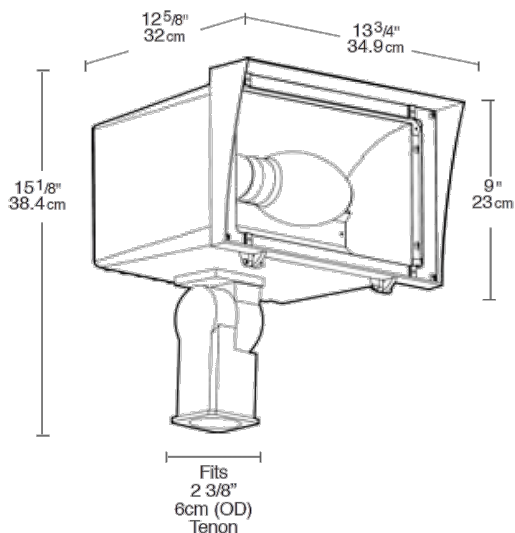

Features

- Optional glare hood, wire guard or polycarbonate shield
- Reflector designed for precise beam control
- Stainless steel screws included
- Long life lamp included
- Supplied with 3' of STW cord
- Rugged trunnion or slipfitter mounting
- New 2" Integra hood to reduce light trespass and glare