



Compact, tough and good looking cast aluminum housing with hinged framed glass lens. Integra Hood glare shield and stainless steel clip. Lamp supplied.

Color: White

Weight: 8.6 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED17
Watts	150W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	24,000
Lamp Lumens	16,000
Efficacy	94.1 LPW

Ballast Info

Type	R-NPF 120V
120V	4.0/2.6A
208V	N/A
240V	N/A
277V	N/A
Input Watts	170W
Efficiency	88%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Electrical

Sockets:

Porcelain with all copper current carrying components

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts

Construction

Housing:

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel fits all standard mounting boxes

Reflector:

Anodized semi-specular aluminum

Lens:

Thermal tempered shock resistant glass

Lens Gasket:

High-temperature tubular silicone set in die cast retaining groove remains in place during relamping

Finish:

Formulated for high durability and long-lasting color

EPA:

0.43.

Other


Patents:

Pat. D420,458.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

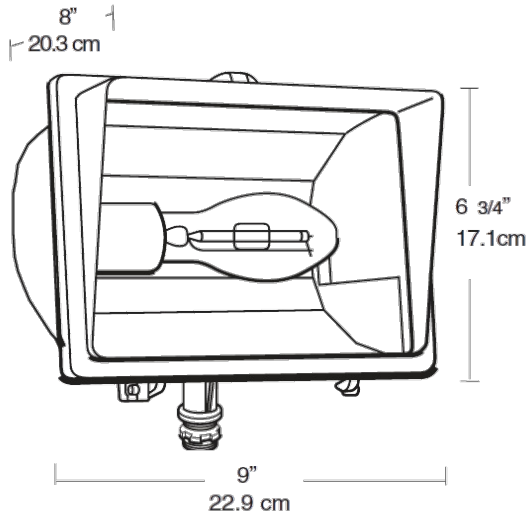

Features

- Easy clip for tool-less relamping with Vandal proof screw capability
- Integra hood glare shield for friendly lighting when properly aimed
- Silicone gasket stays in place for durable weatherproofing & easy relamping
- Precision die cast aluminum housing with durable polyester powder coating
- Variable beam spread with 2 position adjustable socket
- Long life lamp included
- Mounting arm with sturdy locking teeth & internal gasket