



New Integra Hood for Friendly Lighting. Awesome performance with quality and value from this compact 400 and 250 Watt HID flood.

Color: Bronze

Weight: 28.2 lbs

Project:	Type:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type	ED28	Type	CWA-HPF QT
Watts	400W	120V	3.5/4.0A
Shape/Size	N/A	208V	2.0/2.3A
Base	N/A	240V	1.8/2.0A
ANSI	N/A	277V	1.5/1.8A
Hours	15,000	Input Watts	450W
Lamp Lumens	40,000	Efficiency	89%
Efficacy	88.9 LPW		

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

EISA 2007 Compliant:

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

Construction

Housing:

Precision die cast aluminum

Reflector:

High quality anodized aluminum

Lens:

Tempered shock resistant glass

Lens Gasket:

Molded one-piece silicone in die cast retaining groove to remain in place during relamping

Finish:

Formulated for high durability and long-lasting color

EPA:

1.3.

Electrical

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts

Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

Other


Patents:

Pat. D547,477.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

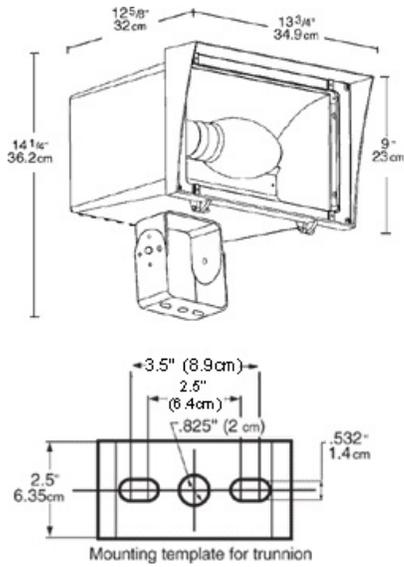

Features

- Optional glare hood, wire guard or polycarbonate shield
- Reflector designed for precise beam control
- Stainless steel screws included
- Long life lamp included
- Supplied with 3' of STW cord
- Rugged trunnion or slipfitter mounting
- New 2" Integra hood to reduce light trespass and glare