



Specification Grade 400 and 250 Watt HID floodlight with cutting edge design, architectural quality, superior features and mounting options at competitive prices.

Color: White

Weight: 33.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED28
Watts	400W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	20,000
Lamp Lumens	40,000
Efficacy	88.9 LPW

Ballast Info

Type	CWA-HPF QT
120V	3.5/4.0A
208V	2.0/2.3A
240V	1.8/2.0A
277V	1.5/1.8A
Input Watts	450W
Efficiency	89%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

EISA 2007 Compliant:

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

Construction

Housing:

Precision die cast aluminum with Wall Bracket, Trunnion or Slipfitter

Reflector:

Anodized aluminum. Field adjustable beam spread.

Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

Finish:

Formulated for high durability and long-lasting color

Lens:

Thermal tempered shock resistant glass, 3/16" thick

Lens Gasket:

High-temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

EPA:

Maximum EPA 2.0.

Electrical

Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base

Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

Other


Patents:

Pat. D552,283.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

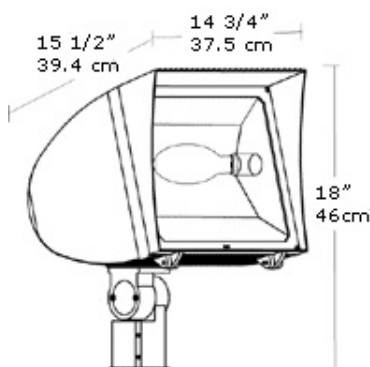

Features

Integra hood glare shield for friendly lighting when properly aimed

Silicone gasket for durable weatherproofing & easy relamping

Precision die cast aluminum housing and lens frame with durable polyester powder coating

Anodized aluminum reflector

Mogul base 4kv pulse rated socket

Two field adjustable socket positions allow fine tuning of beam spread

Fins for heat dissipation extend lamp and ballast life