



Compact, tough and good looking cast aluminum housing with hinged framed glass lens. Integra Hood glare shield and stainless steel clip. Lamp supplied.

Color: White

Weight: 7.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED17
Watts	50W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	10,000
Lamp Lumens	3,400
Efficacy	47.2 LPW

Ballast Info

Type	BMHN50
120V	2/1.6A
208V	N/A
240V	N/A
277V	N/A
Input Watts	72W
Efficiency	69%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

EISA 2007 Compliant:

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

Electrical

Sockets:

Porcelain with all copper current carrying components

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts

Construction

Housing:

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel fits all standard mounting boxes

Reflector:

Anodized semi-specular aluminum

Lens:

Thermal tempered shock resistant glass

Lens Gasket:

High-temperature tubular silicone set in die cast retaining groove remains in place during relamping

Finish:

Formulated for high durability and long-lasting color

EPA:

0.43.

Other


Patents:

Pat. D420,458.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

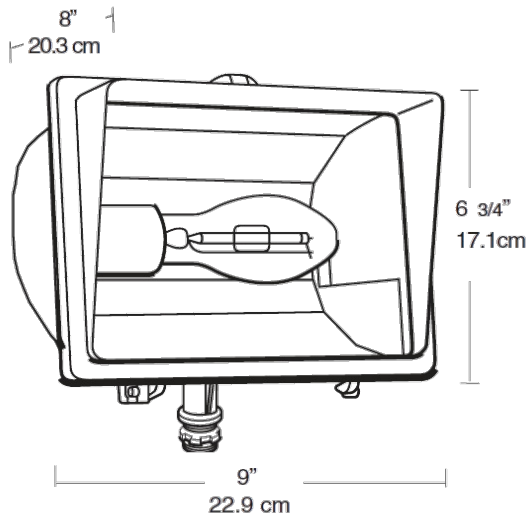

Features

- Easy clip for tool-less relamping with Vandal proof screw capability
- Integra hood glare shield for friendly lighting when properly aimed
- Silicone gasket stays in place for durable weatherproofing & easy relamping
- Precision die cast aluminum housing with durable polyester powder coating
- Variable beam spread with 2 position adjustable socket
- Long life lamp included
- Mounting arm with sturdy locking teeth & internal gasket