



Weight: 0.1 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

#### Driver Info

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	0.00W
Efficiency	N/A

#### LED Info

Watts	0.00W
Color Temp	N/A
Color Accuracy	N/A
L70 Lifespan	N/A
Lumens	N/A
Efficacy	N/A

## Technical Specifications

### Listings

#### UL Listed:

Suitable for wet locations in a covered ceiling

### Optical

#### Optic Accessory:

The HALEd Light Engine comes standard with an 80° optic with frosted lens installed. For 50°, the optic accessory included in your order must be installed.

### Construction

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Formulated for high durability and long-lasting color

### Other

#### Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

50 DEGREES

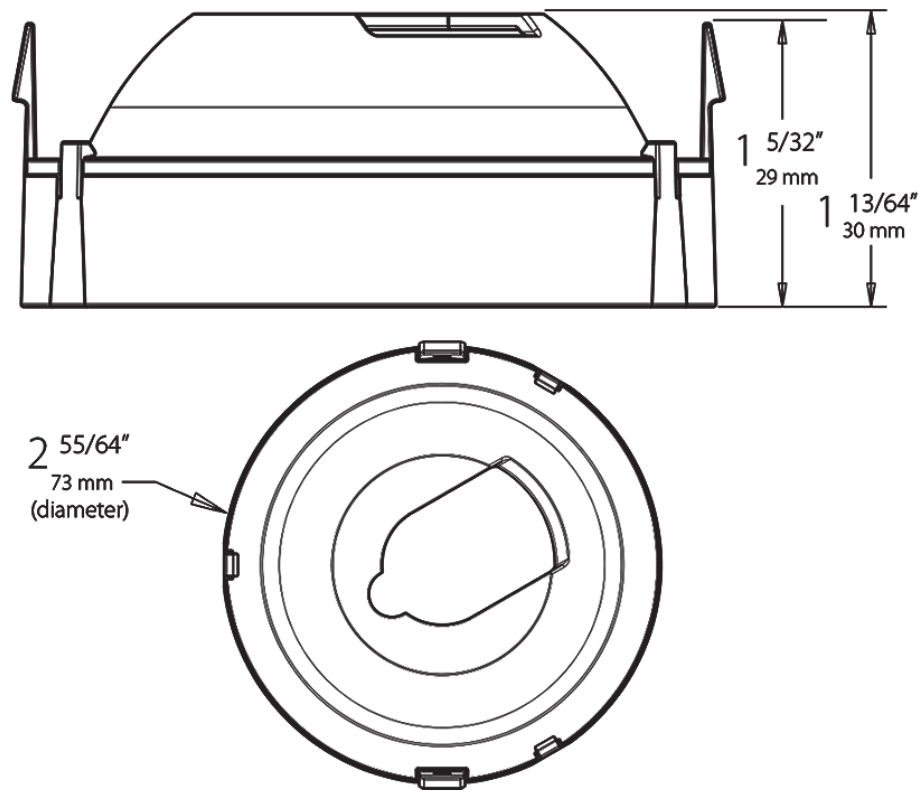

Ordering Matrix

Family	Beam Spread	Lens
HA		
	50 = 50° 80 = 80° WW = Wall Washer	Blank = Solite Prismatic Lens FR = Frosted Lens