

Color: Bronze

Weight: 37.5 lbs

Project:

Type:

Prepared By:

Date:

**Lamp Info**

Type	ED28
Watts	350.00W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	20,000
Lamp Lumens	33,300
Efficacy	83.2 LPW

**Ballast Info**

Type	CWA HPF QT
120V	N/A
208V	N/A
240V	N/A
277V	.6/.9A
Input Watts	400.00W
Efficiency	88%

**Technical Specifications****Listings****UL Listing:**

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

**Electrical****Photocell:**

277V Photocell Included. Photocell is compatible with 208V-277V.

**Socket:**

Porcelain socket pulse rated 4kv, 1500 watts and 600 volts, reinforced with cat's eyes for added durability. Silicone and fiberglass #14 gauge socket leads rated for 200°C. Plated screw shell designed to resist corrosion with spring loaded center contact.

**Construction****Lens Gasket:**

EPDM gasket seals optical chamber preventing dirt and rust

**Housing:**

One-piece precision die cast aluminum with die cast door frame

**Reflector:**

Hydroformed reflector

**Finish:**

Formulated for high durability and long-lasting color

**Lens:**

Thermal, tempered shock resistant glass, 5/32" thick

**Mounting Arm:**

Mounts with two 3/8 threaded rods at 2" on center

**EPA:**

1.8.


**Other****Patents:**

The design of the ALX Area Light is protected by U.S. patent D591,445, Canada Patent D127,045, Mexico Patent 28577 and patents pending in the U.S., China and Taiwan.

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

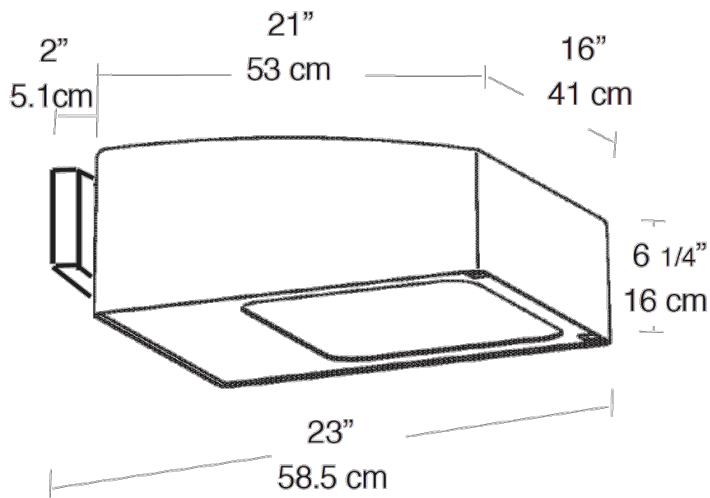

## Features

- Field rotatable optics
- Custom Hydroformed reflector
- Sleek smaller volume design lowers EPA
- Sealed optical chamber
- Stainless steel external hardware
- Silicone lamp retainer keeps lamp in socket
- Lamp supplied