

This economical linear high-bay delivers versatility and ultra-high efficiency. Available in 90, 125, 175 and 260 Watt versions for mounting heights ranging from 15 to 50 feet.

Color: White

Weight: 27.5 lbs

Project:

Type:

Prepared By:

Date:

#### Driver Info

Type	Constant Current
120V	1.09A
208V	0.65A
240V	0.56A
277V	0.46A
Input Watts	129.30W
Efficiency	97%

#### LED Info

Watts	125.00W
Color Temp	4000K (Neutral)
Color Accuracy	84 CRI
L70 Lifespan	50,000
Lumens	17,441
Efficacy	134.9 LPW

## Technical Specifications

### Listings

#### UL Listed:

Suitable for damp locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. DLC Product Code: PGAW7XBQ

### LED Characteristics

#### Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LEDs:

Long-life, high-efficiency, surface mount LEDs

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 1.09A, 208V: 0.65A, 240V: 0.56A, 277V 0.46A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### THD:

7.6% at 120V, 8.1% at 277V

#### Power Factor:

99.5% at 120V, 96.5% at 277V

#### Surge Protection:

4kV

#### Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

### Construction

#### Operating Temperature:

-20°C (-4°F) - 55°C (131°F)

#### Housing:

Die formed painted steel

#### Lens:

Diffused Polymethyl Methacrylate (PMMA)

#### Mounting:

V hooks and optional pendant mounting. AEROBAY™ comes with two 42" chains.

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other

#### Replacement:

125W replaces up to (6) F32T8, (4) F54T5 or 400W HID

## Technical Specifications (continued)

## Other




## 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

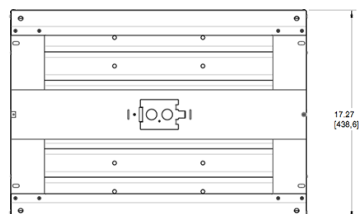

## Features

- High efficiency. Low price.
- Available with factory-installed Lightcloud controls
- Ideal for industrial warehouse spaces
- 50,000 hour LED lifespan
- 5-Year, Limited Warranty

## Ordering Matrix

Family	Length		Wattage	Color Temp	Voltage	Control Options	Battery Backup	Cord & Plug
ARBAY	2	—	125	N			/E2	
	2 = 2 ft. 4 = 4 ft.		90 = 90W 125 = 125W 175 = 175W 260 = 260W	Blank = 5000K (Cool) N = 4000K (Neutral)	Blank = 120-277V /480 = 480V	Blank = No Control Option /LCS = LCHBSENSE w/ mounting arm <sup>1</sup> /LOS = LOSBAY800 w/ mounting arm <sup>1</sup> /LC = Lightcloud® <sup>1</sup>	Blank = No Battery Backup /E2 = Battery Backup	Blank = No cord and plug /8C = 8 ft. cord, no plug /8CP = 8 ft. cord & straight plug, 120V /8CP2 = 8 ft. cord & straight plug, 277V /8CPT2 = 8 ft. cord & Twistlock, 277V /8CPT4 = 8 ft. cord & Twistlock, 480V <sup>2</sup>

<sup>1</sup> For 120V-277V use only.

<sup>2</sup> Can not be combined with any of the control options.