



Color: Bronze

Weight: 29.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED28
Watts	320.00W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	20,000
Lamp Lumens	31,000
Efficacy	84.2 LPW

Ballast Info

Type	CWA HPF QT
120V	2.6/3.2A
208V	1.5/1.8A
240V	1.3/1.6A
277V	1.2/1.4A
Input Watts	368.00W
Efficiency	87%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

Construction

Housing:

Die cast aluminum 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame, Continuous silicone rubber gasket.

Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Finish:

Formulated for high durability and long-lasting color

Optical

Refractor:

Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

Electrical

Pulse Start:


Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

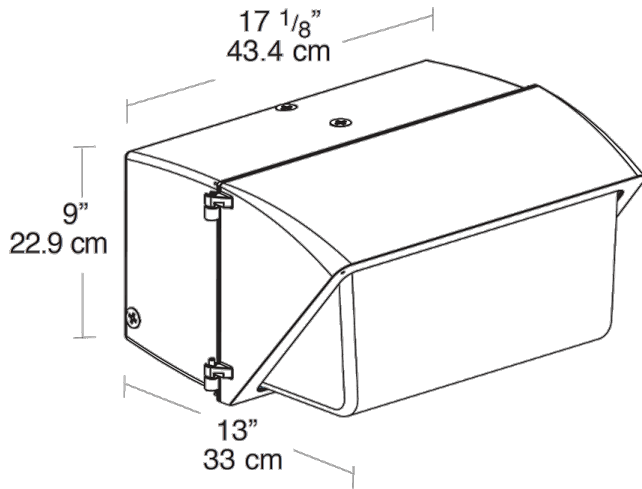

Features

- Hinged door frame opens and remains captive for easy relamping
- Precision die cast aluminum housing with durable polyester powder coating
- Silicone gasket remains in place during relamping
- Tempered glass refractor
- Long life lamp included