



Color: Bronze

Weight: 7.4 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Lamp Info

Type	ED17
Watts	100.00W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	24,000
Lamp Lumens	9,500
Efficacy	82.6 LPW

## Ballast Info

Type	R-NPF 120V
120V	3.0/2.5A
208V	N/A
240V	N/A
277V	N/A
Input Watts	115.00W
Efficiency	87%

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

### Construction

#### Housing:

Die cast aluminum, 1/2" NPS tapped top, both sides and back for conduit or photocontrol. Hinged refractor. Continuous one piece silicone rubber gasket.

#### Reflector:

Semi-Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

### Finish:

Formulated for high durability and long-lasting color

### Conduit Openings:

Top, side and back

### Template:

Drilling template for easy wall box mounting

### Other


#### Patents:

Pat. D440,683.

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

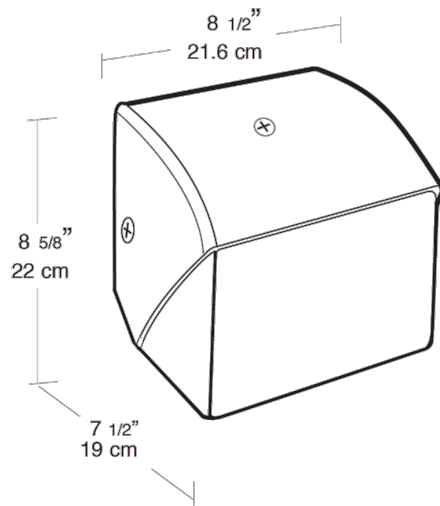

## Features

- Precision die cast aluminum housing with durable polyester powder coating
- Easy access conduit openings & ballasts for fast internal wiring
- Long life lamp included
- Silicone gasket remains in place during relamping
- Cutoff glare shield for "friendly" lighting
- Hinged door swings open and remains captive for easy relamping