



Replace conventional halogen bulbs. Premium Dimmable 90CRI lamps that produce exceptional color and have a long 25,000 hour lifespan.

Color: White

Weight: 0.3 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

**Driver Info**

**LED Info**

|                |                  |               |      |
|----------------|------------------|---------------|------|
| Watts          | 15.00W           | Input Voltage | 120V |
| Color Temp     | 5000K (Daylight) | Power Factor  | 0.9  |
| Lumens         | 1,100            | Flicker       | <30% |
| Efficacy       | 73.3 LPW         | THDi          | N/A  |
| Color Accuracy | 90 CRI           | R9            | 50   |
| L70 Accuracy   | 25,000           |               |      |

## Technical Specifications

**Technical Specifications**

**Product Type:**

A-Line

**Bulb Shape:**

A21

**Wattage:**

15W

**Wattage Equivalency:**

75W Incandescent

**Typical Lumen Output:**

1100

**Efficacy:**

73 lm/W

**Color Temperature:**

5000K Daylight

**CRI:**

90

**Base Type:**

E26

**L70 Lifespan:**

25,000 hours

**Operating Temperature:**

-20°C - 45°C

**Dimmable:**

Yes, down to 10%

**Beam Angle:**

230°

**Warranty:**

4-Year, No-Compromise Warranty

**For Use in Emergency Fixtures:**

No

**For Use Outdoors in Open Fixtures:**

No

**Electrical Characteristics**

**Input Voltage:**

120V

**Power Factor:**

0.9

**Operating Frequency:**

60 Hz

## Technical Specifications (continued)

### Electrical Characteristics

**Flicker:**

<30%

### Listings

**UL Listed:**

Yes


**Energy Star ID:**

2330073

**CEC Status:**

Not lawful for sale in California

## Dimensions

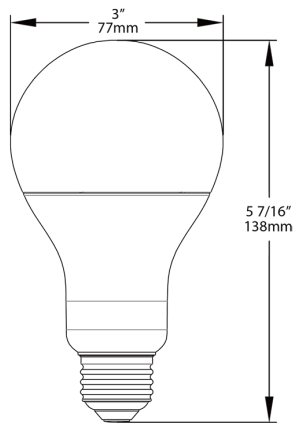

## Features

REPLACE conventional halogen and incandescent bulbs

ENERGY SAVINGS - Save up to 85% on energy

DAMP RATED - Suitable for damp locations

ENCLOSED FIXTURE RATED - May be used in both enclosed and open fixtures

SHATTERPROOF - Plastic lamps for rugged applications

90 CRI - Produces rich and vibrant colors

DIMMABLE - Compatible with most common dimmer models