



Color: Bronze

Weight: 17.6 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Lamp Info

Type	ED17
Watts	150.00W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	10,000
Lamp Lumens	12,500
Efficacy	67.6 LPW

## Ballast Info

Type	CWA-HPF QT
120V	N/A
208V	N/A
240V	N/A
277V	.5/.7A
Input Watts	185.00W
Efficiency	81%

## Technical Specifications

### Electrical

#### THD:

4.7% at 120V, 13.8% at 277V

#### Photocell:

277V Photocell Included. Photocell is compatible with 208V-277V.

#### Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

### Listings

#### UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

### Construction

#### Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

#### Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

#### Cutoff Lens:

Tempered glass

#### Finish:

Formulated for high durability and long-lasting color

### Optical

#### Refractor:


Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

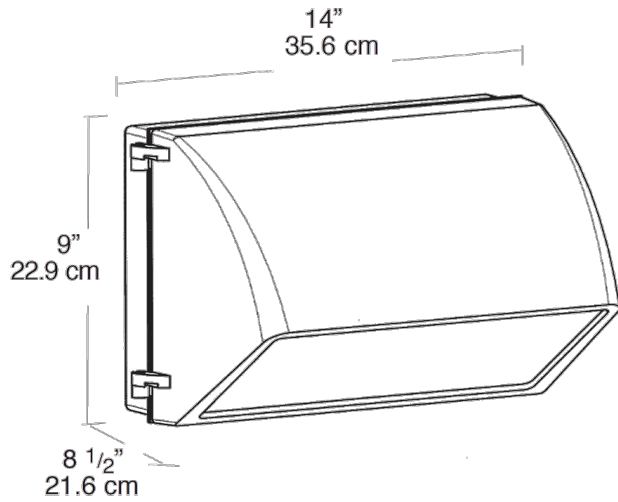

## Features

- Precision die cast aluminum housing with durable polyester powder coating
- Tempered Glass Refractor and Tempered Glass Lens
- Drilling template for easy box mounting
- Silicone gasket remains in place during relamping
- Top, side and back conduit openings
- Cutoff Glare Shield for Friendly Lighting
- Long life lamp included