



Product availability: Stock - Normally stocked in distribution facility

Price\*: 3135.00 USD



### Main

Commercial Status	Commercialised
Range of product	Modicon Quantum automation platform
Product or component type	Ethernet control module

### Complementary

Product compatibility	140CPU6xxxx
Communication port protocol	Ethernet/IP Modbus TCP
Exchange mode	Full duplex
Maximum number of connections	64
Transmission rate	10/100 Mbit/s
Redundancy	Yes hot standby redundant architecture
Topology	Redundant ring Daisy chain loop
Web server	Embedded
Communication service	CIP Explicit messaging (client messaging) CIP implicit messaging (I/O communication) FDR server NTP time synchronization SMTP e-mail notification SNMP agent Embedded 4-port switch DHCP/BootP server Quality of Service (QoS) Device Type Manager (DTM) Embedded router
Ethernet service	Rapid Scanning Tree Protocol (RSTP)
Transmission support medium	Twisted pair
Port Ethernet	10BASE-T/100BASE-TX, connector type: RJ45
Marking	CE
Supply	Via the power supply of the rack
Local signalling	1 LED green/red for extended DIO network status (Net Status 2) 1 LED green/red for device network status (Net Status 1) 1 LED green/red for network communication status (Net Status) 1 LED green/red for module status (Mod Status) 1 LED green for configuration status (Ready) 1 LED green for communication on the bus (Active)

Module format	Standard
Product weight	0.76 lb(US) (0.345 kg)

## Environment

Standards	CSA C22.2 No 142 EN 55011 EN 61131-2 FM Class 1 Division 2 IEC 61000-4-16 UL 508 EN 61131-1
Product certifications	C-Tick GOST LR Hazardous location class 1, division 2 Merchant Navy
IP degree of protection	IP20
Ambient air temperature for operation	32...140 °F (0...60 °C)
Relative humidity	10...95 % at 140 °F (60 °C) - without condensation

## Ordering and shipping details

Category	18150 - QUANTUM CONTROLLERS,HSBY,COMM.
Discount Schedule	PC21
GTIN	00785901282754
Nbr. of units in pkg.	1
Package weight(Lbs)	1.22
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	FR

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1208 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations


## Contractual warranty

Period	18 months
--------	-----------

---

Presentation


---

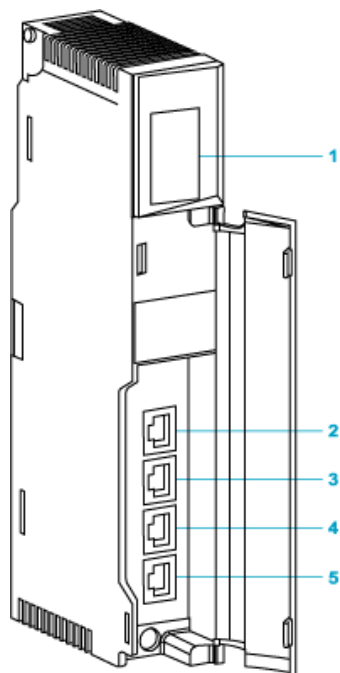

- 1 LED display
- 2 SERVICE/EXTEND port (ETH 1)
- 3 INTERLINK port (ETH 2)
- 4 CTRL NETWORK port (ETH 3)
- 5 CTRL NETWORK port (ETH 4)

## Racks for Modules Mounting

### Dimensions of Modules and Racks

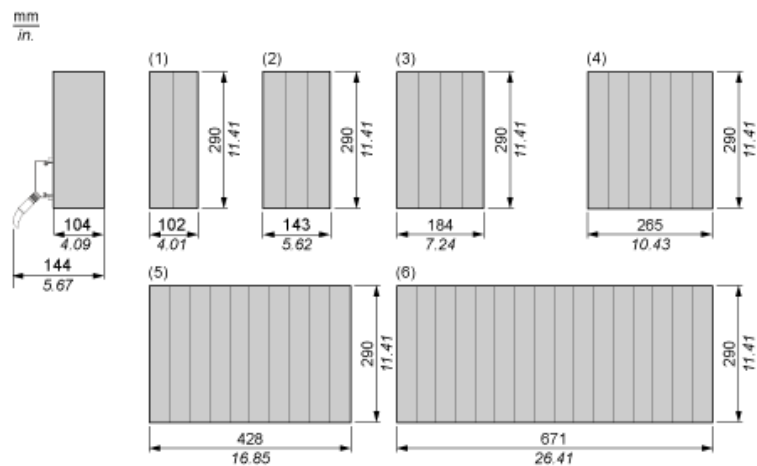

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots