Product data sheet Characteristics

TSXETY4103

Ethernet TCP/IP module - 10/100 Mbit/s - web server class B30

Product availability: Stock - Normally stocked in distribution facility

Price*: 3150.00 USD



Main Comn

| Commercial Status | Commercialised |
|---------------------------|---|
| Range of product | Modicon Premium Automation platform |
| Product or component type | Ethernet TCP/IP module |
| Physical interface | RJ45 10BASE-T/100BASE-TX 1 twisted pair |
| Transmission rate | 10/100 Mbit/s |
| Communication service | Uni-TE messaging SNMP agent SMTP e-mail notification Modbus TCP messaging I/O scanning Global Data FDR server Bandwidth management |
| Supply | Via the power supply of the rack |
| Local signalling | LED transmission/reception activity (TX/TR) LED Ethernet port fault (ERR) LED Ethernet network status (RUN) LED collision detection (COL) |

Complementary

| Communication port protocol | Modbus TCP Uni-Telway | |
|-------------------------------|--|--|
| Maximum number of connections | 64 | |
| Web server | Transparent ready class B30 | |
| Web services | Data Editor (via PC terminal) Rack viewer | |
| Marking | CE | |
| Product compatibility | Unity Pro PL7 Pro | |
| Current consumption | 360 mA 5 V DC | |
| Module format | Standard | |
| Product weight | 0.75 lb(US) (0.34 kg) | |

Environment

| Standards | CSA 1010-1 | |
|---------------------------------------|---|--|
| | EN 61131-2 | |
| | FM Class 1 Division 2 group A | |
| | FM Class 1 Division 2 group B | |
| | FM Class 1 Division 2 group C | |
| | FM Class 1 Division 2 group D | |
| | UL 508 | |
| IP degree of protection | IP20 | |
| Ambient air temperature for operation | 32140 °F (060 °C) | |
| Relative humidity | 1095 % at 140 °F (60 °C) without condensation | |

Ordering and shipping details

| Category | 22558 - TSX PREMIUM, ATRIUM & PL7 PRO | |
|-----------------------|---|--|
| Discount Schedule | PC22 | |
| GTIN | 00785901233138 | |
| Nbr. of units in pkg. | 1 | |
| Product availability | Stock - Normally stocked in distribution facility | |
| Returnability | Υ | |
| Country of origin | FR | |

Offer Sustainability


| Sustainable offer status | Not Green Premium product |
|----------------------------------|--|
| RoHS (date code: YYWW) | Compliant - since 0832 - Schneider Electric declaration of conformity |
| REACh | Reference contains SVHC above the threshold - oto CaP for more details |
| Product end of life instructions | Need no specific recycling operations |

Contractual warranty

| Warranty period 18 months | | |
|---------------------------|-----------------|-----------|
| | Warranty period | 18 months |

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

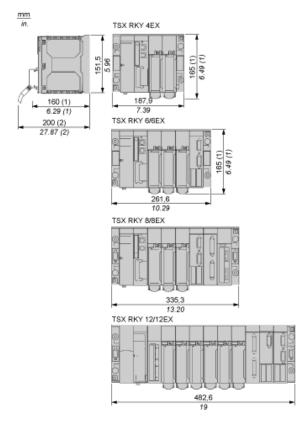

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.