

TM2AMI2HT

analog input module M238 - 2 inputs voltage/
current high level- non differential



Product availability: Stock - Normally stocked in distribution facility

Price*: 368.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon M238 logic controller
Product or component type	Analog input module
Analogue input number	2
Input level	High level
Analogue input type	Voltage 0...10 V non differential Current 4...20 mA non differential
Cross talk	<= 2 LSB

Complementary

Range compatibility	Advantys OTB Twido
Analogue input resolution	12 bits
LSB value	4.8 μ A current current 2.5 mV voltage voltage
Permissible continuous overload	40 mA current 13 V voltage
Input impedance	>= 1 MOhm voltage 10 Ohm current
Sampling duration	<= 10 ms
Acquisition period	10 ms per channel + 1 controller cycle time
Measurement error	+/- 0.2 % of full scale 25 °C
Temperature coefficient	+/-0.006 %FS/°C
Repeat accuracy	+/-0.5 %FS
Non-linearity	+/- 0.2 %FS
Total error	+/-1 %FS
Type of cable	Shielded cable
Insulation between channel and internal logic	Photocoupler
Supply	External supply
[Us] rated supply voltage	24 V DC
Supply voltage limits	20.4...28.8 V
Electrical connection	1 removable screw terminal block
Current consumption	50 mA 5 V DC internal 40 mA 24 V DC external
Product weight	0.19 lb(US) (0.085 kg)

Environment

Dielectric strength	500 V between the I/O and the external supply circuit 500 V between the I/O and internal logic
Width	0.93 in (23.5 mm)
Depth	2.76 in (70 mm)
Height	3.54 in (90 mm)

Ordering and shipping details

Category	22531 - PLCS, TWIDO, TWD
Discount Schedule	PC12
GTIN	00785901825579
Nbr. of units in pkg.	1
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	JP

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1039 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold - go to CaP for more details
Product environmental profile	Available  Download Product Environmental Profile
Product end of life instructions	Available  Download End Of Life Manual

Contractual warranty

Warranty period	18 months
-----------------	-----------


Analog Input Module (2-channel, Voltage/Current)

Dimensions

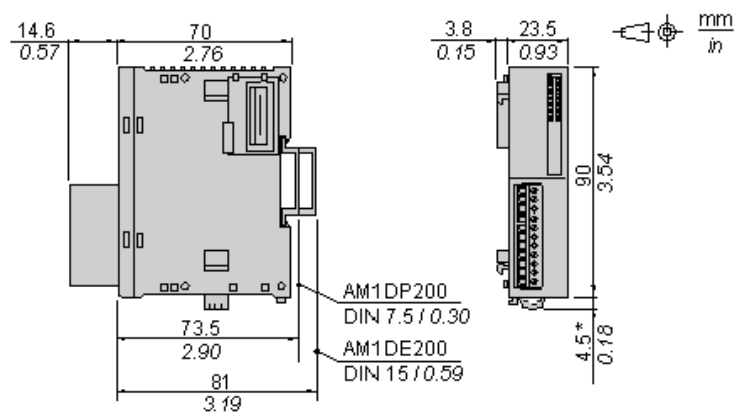

NOTE: * 8.5 mm (0.33 in) when the clip-on lock is pulled out.

DIN Rail Mounting

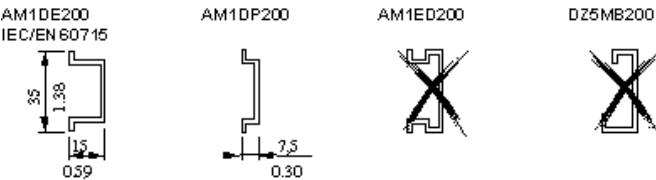


Rail depth	Catalogue part number
15 mm (0.59 in.)	AM1DE200
7,5 mm (0.30 in.)	AM1DP200

NOTE: Do not use AM1ED200 and DZ5MB200





Module Mounting on a Panel Surface

Mounting Hole Layout

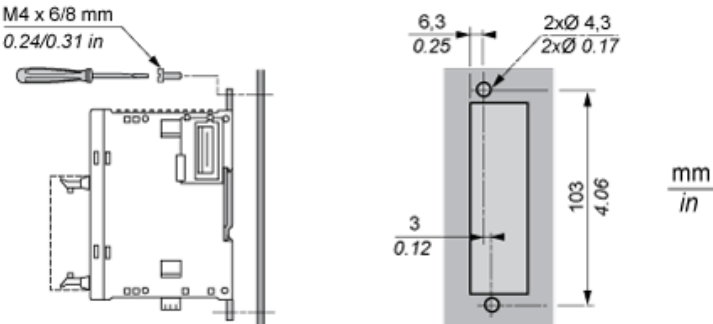


Wiring Requirements

Cable Types and Wire Sizes for Removable Screw Terminal Block

							
mm ²	0,14...1,5	0,25...0,5	0,25...1,5	0,14...0,5	0,14...0,75	0,25...0,34	0,5
AWG	26...16	24...20	24...16	26...20	26...18	24...22	20

Analog Input Module (2-channel, Voltage/Current)

Wiring Diagram

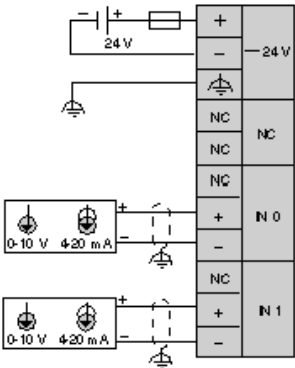

The (-) poles of inputs IN0 and IN1 are connected internally.