

TSXSCY11601

RS485 communication module - 2 twisted shielded pairs cable - 32 devices

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 1178.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon Premium Automation platform
Product or component type	Communication module
Software designation	Unity Pro
Structure type	Heterogeneous industrial bus

Complementary

Product compatibility	Atrium Premium
Method of access	Master/Slave type
Integrated connection type	1 serial link 1 SUB-D 25
Communication port protocol	Modbus
Communication port support	RS485 isolated
Mode of transmission	Asynchronous in baseband
Transmission frame	Character mode RTU/ASCII Uni-Telway
Transmission rate	1.2...19.2 kbit/s
Transmission support medium	2 twisted shielded pairs cable
Number of devices	32
Number of addresses	0...247
Bus length	4265.09 ft (1300 m) Uni-Telway 4265.09 ft (1300 m) Modbus 4265.09 ft (1300 m) character mode
Tap links length	49.21 ft (15 m)
Requests	120 words per request 1920 bits per request
Control parameter	One CRC 16 on each frame
Monitoring function	Diagnostic counters Event counters

Modbus functions available	Write 1 word or n word Modbus master 06 Write 1 output bit Modbus slave 05 Write 1 input word Modbus slave 06 Write 1 bits or n bits Modbus master 05 Read words Modbus master 03 Read n output words Modbus slave 03 Read n output bits Modbus slave 01 Read n input words Modbus slave 04 Read n input bits Modbus slave 02 Read input bits Modbus master 04 Read input bits Modbus master 02 Read bits Modbus master 01 Exceptional read status Modbus slave 07 Exceptional read status Modbus master 07 Diagnostic Modbus slave 08 Diagnostic Modbus master 08 Write n output words Modbus slave 10 Write n output bits Modbus slave 0F Slave identification Modbus master 11 Identification Modbus slave 11 Event counter Modbus slave 0B Event counter Modbus master 0B Event connection Modbus slave 0C Event connection Modbus master 0C
Local signalling	1 LED module operating (RUN) 1 LED internal fault, module failure (ERR) 1 LED communication (CH0)
Current consumption	350 mA 5 V DC
Module format	Standard
Product weight	0.75 lb(US) (0.34 kg)

Environment

Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	5...95 % without condensation
Operating altitude	<= 6561.68 ft (2000 m)

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	00785901659426
Nbr. of units in pkg.	1
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0925 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold - go to CaP for more details
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

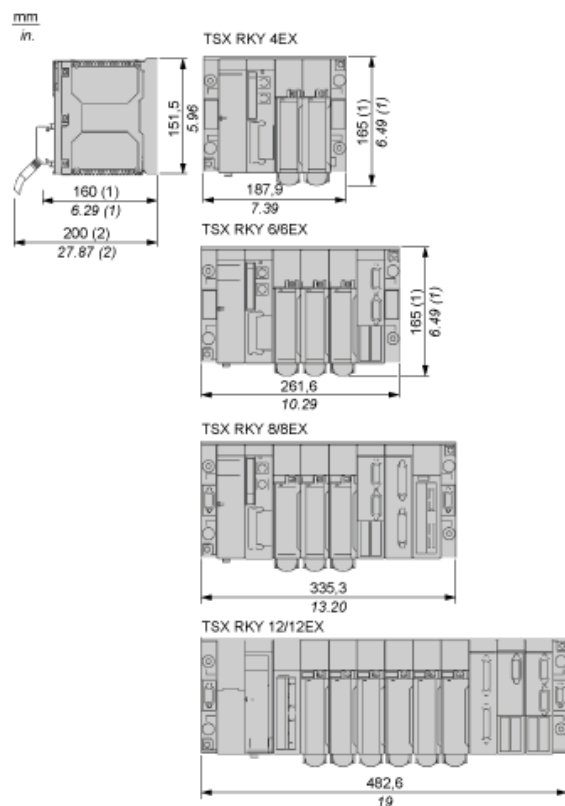

- (1) With screw terminal block modules.
(2) Maximum depth for all types of modules and their associated connectors.

Connecting the Serial Link Communication Module

