



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 216.00 USD



Main

Commercial Status	Commercialised
Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Buzzer
Device short name	XVR
Mounting diameter	4.72 in (120 mm)
IP degree of protection	IP23 conforming to IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, blue
Noise level	50...90 dB (continuous or intermittent tone)at 1 m

Complementary

Material	AS (globe) ABS (acrylonitrile butadiene-styrene) (body part)
CAD overall width	4.72 in (120 mm)
CAD overall depth	4.72 in (120 mm)
Product weight	1.1 lb(US) (0.5 kg)
Marking	CE
Product mounting	By 3 M5 screws
Supply voltage limits	10.8...13.2 V AC 10...15 V DC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	333 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm ²
AWG gauge	AWG 18
Cable length	15.75 in (400 mm)

Environment

Standards	EN 61000-6-2 EN 61000-6-4
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Class of protection against electric shock	Class II conforming to IEC 61140

Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901557180
Nbr. of units in pkg.	1
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	JP

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Rotating Mirror Beacon

Dimensions

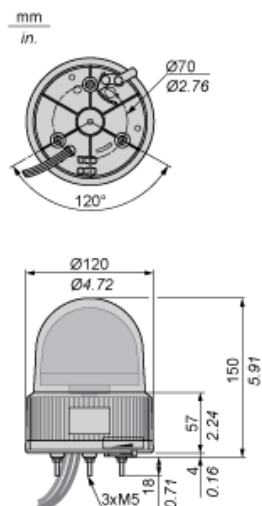

Rotating Mirror Beacon

Panel Cut-out

