

XB5S5B2L2

BIOMETRIC SW FOR HMI USB 2M CABLE

Price*: 655.00 USD



Main

| | |
|-------------------------------|---|
| Commercial Status | Commercialised |
| Range of product | Harmony XB5S |
| Product or component type | Biometric switch |
| Product specific application | Industrial machines Materials handling |
| Device short name | XB5S |
| Bezel material | Plastic |
| Mounting diameter | 0.87 in (22 mm) |
| Output type | PNP |
| Sale per indivisible quantity | 1 |
| IP degree of protection | IP65 front face conforming to EN/IEC 60529 IP20 rear face conforming to EN/IEC 60529 |
| Type of operator | Stay put |
| Operator position information | 2 positions |
| Operator profile | Fingerprint reader |
| Connections - terminals | 1 pre-wired cable, clamping capacity: 3 x 0.11 mm ² |
| Memory usage | 200 users with up to 2 fingerprints per user |

Complementary

| | |
|-----------------------------|---|
| Product compatibility | Magelis iPC industrial PCs Magelis Panel PC |
| Software designation | Vijeo Designer |
| Enclosure material | Polyamide PA66 |
| Cable insulation material | PvR |
| Operating position | Flat surface installation Horizontal position Vertical surface installation |
| Product weight | 0.45 lb(US) (0.202 kg) |
| Marking | CE |
| Communication port protocol | USB |
| Type of connector | USB type A male with 3.28 ft (1 m) cable |
| Short circuit protection | 250 mA by gG external fuse |
| [Us] rated supply voltage | 24 V DC |
| Electrical connection | Free wire ends with 3 wires of 6.56 ft (2 m) |
| Supply voltage limits | 20...30 V DC |
| Protection type | Overload protection Reverse polarity Short-circuit |
| Maximum switching current | <= 200 mA |
| [Ures] residual voltage | <= 1 V, closed state |
| Current consumption | <= 50 mA no-load |

Environment

| | |
|---------------------------------------|--|
| Ambient air temperature for storage | -13...158 °F (-25...70 °C) |
| Ambient air temperature for operation | 23...122 °F (-5...50 °C) |
| NEMA degree of protection | NEMA 12 |
| Standards | IEC 61000-6-2 IEC 61000-6-4 |
| Product certifications | CSA UL |
| Vibration resistance | 1 gn (f = 9...500 Hz) conforming to IEC 60068-2-6 +/- 3 mm (f = 5...9 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 50 gn 11 ms conforming to IEC 60068-2-27 |

Ordering and shipping details

| | |
|-----------------------|--|
| Category | 22471 - BIOMETRIC PUSHBUTTON DO NOT NEGOT. |
| Discount Schedule | I |
| GTIN | 00785901665915 |
| Nbr. of units in pkg. | 1 |
| Returnability | Y |
| Country of origin | FR |


Offer Sustainability

| | |
|--------------------------|---------------------------|
| Sustainable offer status | Not Green Premium product |
| RoHS (date code: YYWW) | Will not be Compliant |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions of Biometric Switches

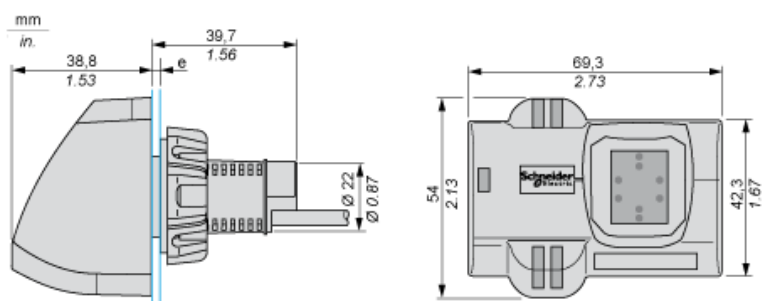

e: 1 to 6 mm / 0.04 to 0.24 in.