

XPSBCE3110C

module XPSBCE - two-hand control - 24 V AC/DC

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 460.00 USD



Main

Commercial Status	Commercialised
Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSBCE
Safety module application	For electrical monitoring of two-hand control stations
Function of module	Monitoring two-hand control station
Safety level	Can reach SILCL 3 conforming to EN/IEC 62061 Can reach PL e/category 4 conforming to EN/ISO 13849-1
Safety reliability data	PFHd = 3E-8 1/h conforming to EN/IEC 62061 MTTFd = 37 years conforming to EN/ISO 13849-1 DC > 99 % conforming to EN/ISO 13849-1
Connections - terminals	Spring terminals, removable terminal block, clamping capacity: 2 x 0.5...2 x 1 mm ² flexible cable with cable end, with double bezel Spring terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, with bezel Spring terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, without bezel Spring terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² flexible cable without cable end Spring terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² solid cable without cable end
Output type	Relay 2 NO, volt-free
Number of additional circuits	1 NC
[Us] rated supply voltage	24 V AC/DC (- 15...10 %)

Complementary

Synchronisation time between inputs	0.5 s
Supply frequency	50/60 Hz
Power consumption	<= 4 VA
Input protection type	Internal, electronic
Number of inputs	1 NC + NO
Input compatibility	Two-hand control conforming to EN 574/ISO 13851-III C
Control circuit voltage	24 V DC
Breaking capacity	B300: holding 160 VA AC-15 relay output B300: inrush 3600 VA AC-15 relay output
Breaking capacity	1.5 A - L/R = 50 ms, DC-13 for relay output
[Ith] conventional free air thermal current	<= 6 A
Associated fuse rating	6 A gG for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 50 ms

[Ui] rated insulation voltage	300 V, degree of pollution 2 conforming to DIN VDE 0110 part 1 300 V, degree of pollution 2 conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III, conforming to DIN VDE 0110 part 1 4 kV overvoltage category III, conforming to IEC 60947-5-1
Local signalling	3 LEDs
Mounting support	35 mm symmetrical DIN rail
Product weight	0.6 lb(US) (0.272 kg)

Environment

Standards	EN 574 type III C/ISO 13851 EN/IEC 60204-1 EN/IEC 60947-5-1
Product certifications	BG CSA UL
IP degree of protection	IP40(Enclosure) conforming to EN/IEC 60529 IP20(Terminals) conforming to EN/IEC 60529
Ambient air temperature for operation	-13...131 °F (-25...55 °C)
Ambient air temperature for storage	-13...167 °F (-25...75 °C)


Ordering and shipping details

Category	22477 - SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
Nbr. of units in pkg.	1
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	DE

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

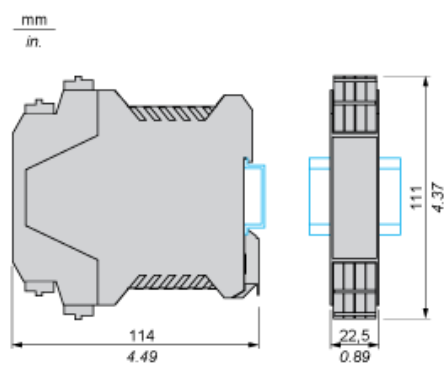

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

The screenshot shows the Schneider Electric website interface for the XPSAC5121 module. On the left, a sidebar titled "Discover XPSAC5121 by" lists several categories: Characteristics, Dimensions Drawings, Connections and Schema, Technical Description, and Download & Documents. The "Download & Documents" category is highlighted with a red box and a circled number 1. The main content area displays the product name "XPSAC5121" and its description "module XPSAC - Emergency stop - 24 V AC DC". Below this, there is a link to "Download XPSAC5121 product datasheet". A table titled "Download & Documents 1 to 3 of 3 (Total: -1)" lists three documents: "Instruction sheet", "Image of product", and "Certificate". The "Instruction sheet" row is highlighted with a red box and a circled number 2. It shows the document title "XPSAC... Safety module for emergency stop and switch monitoring", the language "English", the date "2012-07-04", and a download button labeled "pdf (29)".

Discover XPSAC5121 by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Technical Description
- Download & Documents

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC

Download XPSAC5121 product datasheet

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet			
XPSAC... Safety module for emergency stop and switch monitoring	English	2012-07-04	pdf (29)
Image of product			
Emergency stop and switch monitoring		2010-11-10	(Select :)
Certificate			
Russian certificate		English	2010-07-07 pdf (60)

1

2

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.