## Product data sheet Characteristics

### XPSATR11530P

# module XPSATR - Emergency stop and protective guard - 24V DC, time delay 30s

Product availability: Stock - Normally stocked in distribution facility

Price\*: 600.00 USD

Type of start

Output type

circuits

Number of additional

[Us] rated supply voltage



#### Main Commercial Status Commercialised Range of product Preventa Safety automation Product or component Preventa safety module type Safety module name **XPSATR** Safety module For emergency stop and protective guard applications application Function of module Emergency stop monitoring 1-channel wiring Emergency stop monitoring 2-channel wiring Protective guard monitoring Safety level Can reach SILCL 3 conforming to EN/IEC 62061 time delay safety outputs Can reach PL e/category 4 conforming to EN/ISO 13849-1 instantaneous safety outputs PFHd = 2E-9 1/h conforming to EN/IEC 62061 Safety reliability data

Automatic Manual

Connections - terminals	Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.52 x 1.5 mm² flexible cable with cable end, with bezel
	Captive screw clamp terminals, removable terminal
	block, clamping capacity: 2 x 0.22 x 1 mm <sup>2</sup> solid or flexible cable without cable end
	Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.21 x 2.5 mm <sup>2</sup> solid or
	flexible cable without cable end
	Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.252 x 1 mm <sup>2</sup> flexible cable with cable end, without bezel
	Captive screw clamp terminals, removable terminal
	block, clamping capacity: 1 x 0.251 x 1.5 mm <sup>2</sup> flexible cable with cable end, with bezel
	Captive screw clamp terminals, removable terminal
	block, clamping capacity: 1 x 0.251 x 2.5 mm² flexible cable with cable end, without bezel

Relay time delay opening 3 NO, volt-free Relay instantaneous opening 3 NO, volt-free

24 V DC (- 15...10 %)

MTTFd = 85 years conforming to EN/ISO 13849-1 DC > 99 % conforming to EN/ISO 13849-1

#### Complementary

Synchronisation time between inputs	1 s	
Power consumption in W	2.8 W DC	
Input protection type	Internal, electronic	
Time delay range	030 s	
Control circuit voltage	24 V DC	
Breaking capacity	3 A at 24 V (DC-13) for relay output	
Output thermal current	6 A instantaneous and time delay outputs	

[Ith] conventional free air thermal current	8 A
Associated fuse rating	6 A fuse type gG for instantaneous and time delay outputs conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 20 ms
[Ui] rated insulation voltage	300 V
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	5 LEDs
Mounting support	35 mm symmetrical DIN rail
Product weight	0.73 lb(US) (0.33 kg)

#### Environment

Standards	EN 60204-1 EN/IEC 60947-5-1 EN/IEC 61496-1 EN/ISO 13849-1 EN 62061 EN 50156-1	
Product certifications	CSA TÜV UL	
IP degree of protection	IP40 (enclosure) conforming to EN/IEC 60529 IP20 (terminals) conforming to EN/IEC 60529	
Ambient air temperature for operation	-13131 °F (-2555 °C)	
Ambient air temperature for storage	-13167 °F (-2575 °C)	

### Ordering and shipping details

Category	22477 - SAFETY MODULES (PREVENTA)	
Discount Schedule	SAF2	
GTIN	00785901453673	
Nbr. of units in pkg.	1	
Product availability	Stock - Normally stocked in distribution facility	
Returnability	Υ	
Country of origin	DE	

### Contractual warranty


Warranty period	18 months
-----------------	-----------



# Product data sheet Dimensions Drawings

## XPSATR11530P

#### **Dimensions**

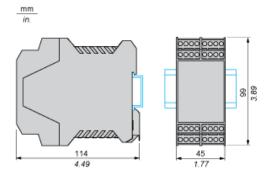


## XPSATR11530P

#### Wiring Diagrams

#### Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

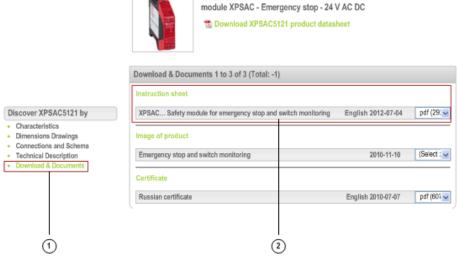

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.