

Product End-of-Life Instructions


Twido programmable controller

Product Range

Twido programmable controller

Marketing Model

TWDLCAE40DRF, TWDLCAA40DRF, TWDLCD40DRF, TWDLCDE40DRF

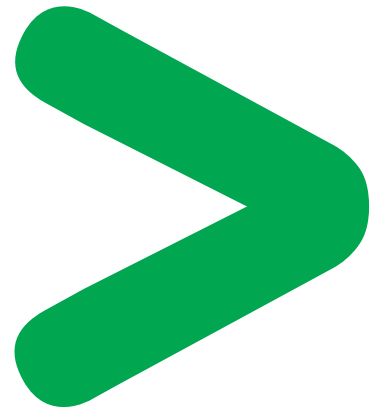

Size in mm:

H x L x D : 157 x 90 x 70

Weight in g:

565 with battery



Schneider
Electric


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ Separation for special treatment ⇒ Other Dismantling ⇒ Shredding

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

This product contains printed circuit boards, electrolytic capacitors, battery and bromide plastic parts which are recommended to be treated separately during the End of Life operations.

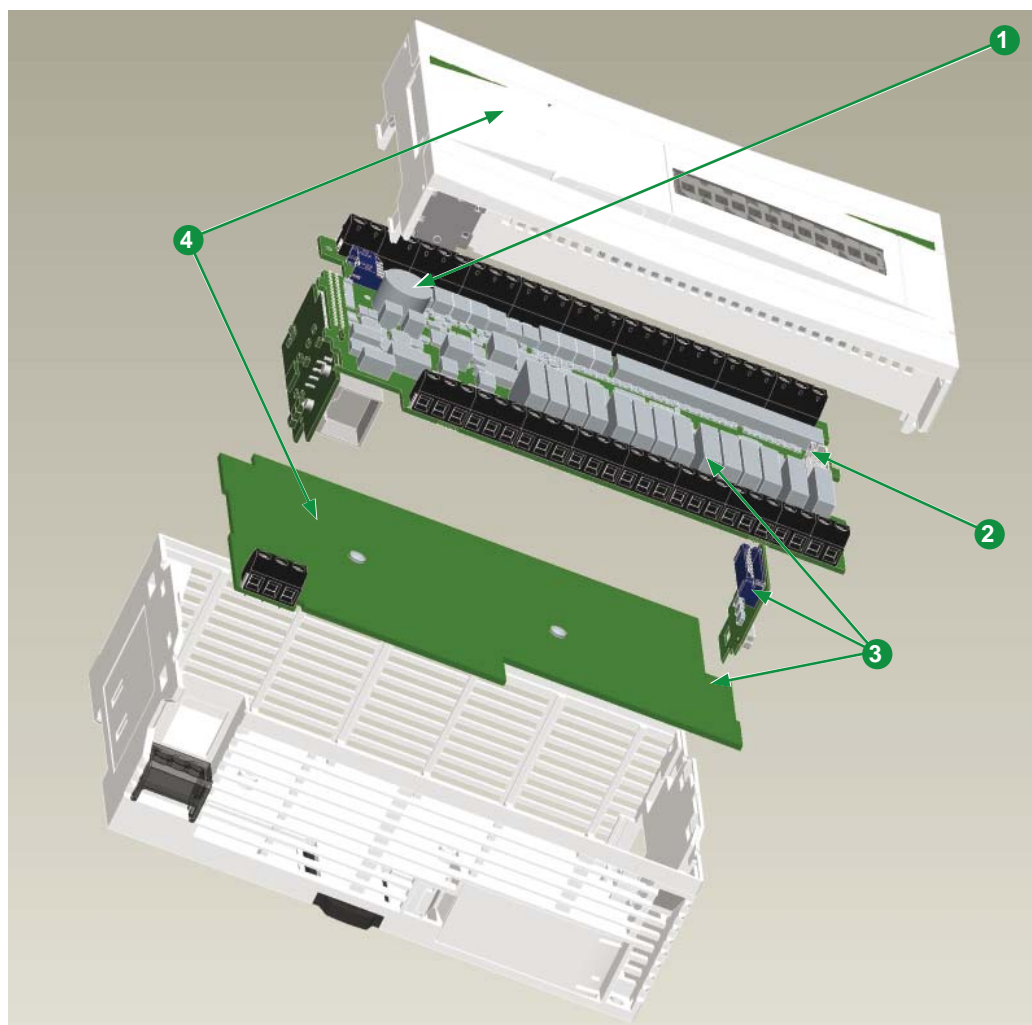

Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards	①	Electrolytic capacitor	38.4	Electrical shock
	②	Battery	0.95	—
Special treatment	①	Electrolytic capacitor	38.4	—
	②	Battery	0.95	—
	③	PCBA	334	—
	④	Plastic	160	PC contains brominated flame retardant

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V2.

Publication : Schneider Electric