



Product availability: Stock - Normally stocked in distribution facility

Price*: 7022.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon Quantum automation platform
Product or component type	Unity processor

Complementary

Clock frequency	66 MHz
Number of slots	10 16 2 4 6
Number of racks	2 - local rack(s)
Number of distributed I/O station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number of remote I/O station	0 - 0 ethernet remote I/O rack(s) 31 - 2 S908 remote I/O rack(s)
Discrete I/O number	8000 inputs, 8000 outputs - distributed - per network Modbus Plus 31744 inputs, 31744 outputs - remote Unlimited (27 slots max) - local
Analogue I/O number	1984 inputs, 1984 outputs - S908 remote I/O 500 inputs, 500 outputs - distributed - per network Modbus Plus Unlimited (27 slots max) - local
Application specific I/O	Accurate time stamping Counter High-speed interrupt inputs Serial link
Number of optional modules	2 (Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum number of connections	4 (AS-Interface) - remote 2 (Profibus DP) - local 2 (Modbus) - RS232/485 Modbus/ASCII 2 (Modbus Plus) - local 2 (Ethernet TCP/IP) - local 2 (AS-Interface) - distributed 1 (USB)
Integrated connection type	2 Modbus with 1 Modbus Plus with
Checks	Process control
Memory description	Internal RAM 548 kB

Switch function	Slide switch communication port : ASCII/RTU/Memory Slide switch memory port/off
Application structure	No auxiliary task - 64 interrupt tasks - 64 I/O interrupt tasks - 16 timer interrupt tasks - 1 periodic fast task - 1 cyclic/periodic master task -
Execution time per instruction	0.12...0.585 µs on word 0.12...0.585 µs Boolean 0.1...0.27 µs on fixed-point arithmetic 0.1...0.27 µs floating points
Number of instructions per ms	2.49 Kinst/ms if 65 % Boolean and 35 % numerical 1.86 Kinst/ms if 100 % Boolean
System overhead	1 ms - master task 0.2 ms - fast task
Bus current requirement	1800 mA
Local signalling	1 LED redfor communications error on the Modbus Plus port (ERROR A) 1 LED redfor battery needs replacing or is not present (BAT LOW) 1 LED orangefor write-protected memory (memory port) 1 LED greenfor CPU has passed the power-up diagnostic tests (READY) 1 LED greenfor CPU has been started and is solving logic (RUN) 1 LED greenfor communications are active on the Modbus port (Modbus) 1 LED greenfor communications are active on the Modbus Plus port (Modbus Plus)
Electrical connection	2 female connectors, connector type: SUB-D 9 for connecting to the Modbus bus 1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network

Environment

Product certifications	CE CSA UL
Standards	HazLoc

Ordering and shipping details

Category	18150 - QUANTUM CONTROLLERS,HSBY,COMM.
Discount Schedule	PC21
GTIN	00785901663386
Nbr. of units in pkg.	1
Package weight(Lbs)	1.70
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0948 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental Profile
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

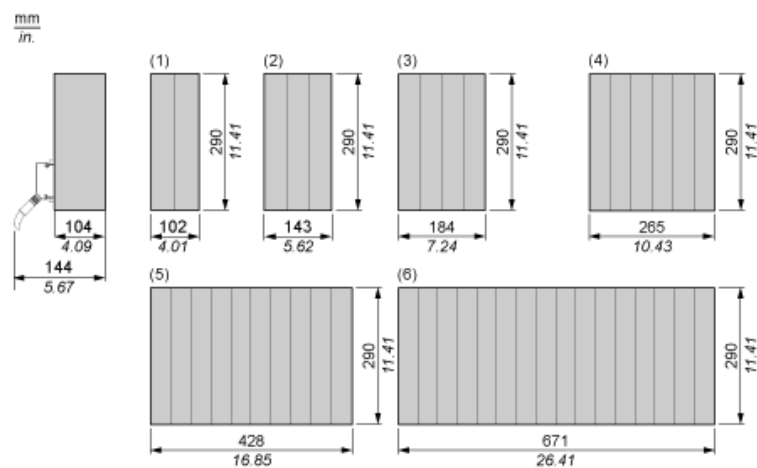

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots