Product data sheet Characteristics

140NOC78000

Modicon Quantum Ethernet DIO network module - RJ45 - 10/100 Mbit/s



Product availability: Stock - Normally stocked in distribution facility

Price*: 2740.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon Quantum automation platform
Product or component type	Ethernet I/O head module

Complementary

Complementary	
Product compatibility	140CPU6xxxx
Communication port protocol	Ethernet/IP Modbus TCP
Exchange mode	Full duplex
Maximum number of connections	128
Transmission rate	10/100 Mbit/s
Redundancy	Yes hot standby redundant architecture
Topology	Redundant ring Daisy chain loop
Web server	Embedded
Communication service	CIP Explicit messaging (client messaging) CIP implicit messaging (I/O communication) FDR server NTP time synchronization SNMP agent Embedded 4-port switch DHCP/BootP server Quality of Service (QoS) Device Type Manager (DTM)
Ethernet service	Rapid Scanning Tree Protocol (RSTP)
Transmission support medium	Twisted pair
Port Ethernet	10BASE-T/100BASE-TX, connector type: RJ45
Marking	CE
Supply	Via the power supply of the rack
Local signalling	1 LED green/red for extended DIO network status (Net Status 2) 1 LED green/red for device network status (Net Status 1) 1 LED green/red for network communication status (Net Status) 1 LED green/red for module status (Mod Status) 1 LED green for configuration status (Ready) 1 LED green for communication on the bus (Active)

Module format	Standard
Product weight	0.76 lb(US) (0.345 kg)
Environment	
Standards	CSA C22.2 No 142 EN 55011 EN 61131-2 FM Class 1 Division 2 IEC 61000-4-16 UL 508 EN 61131-1
Product certifications	C-Tick GOST LR Hazardous location class 1, division 2 Merchant Navy
IP degree of protection	IP20
Ambient air temperature for operation	32140 °F (060 °C)
Relative humidity	1095 % at 140 °F (60 °C) - without condensation
Category	18150 - QUANTUM CONTROLLERS,HSBY,COMM.
Category Discount Schedule	PC21
Category Discount Schedule GTIN	PC21 00785901298540
Category Discount Schedule GTIN Nbr. of units in pkg.	PC21 00785901298540 1
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs)	PC21 00785901298540 1 1.22
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability	PC21 00785901298540 1
Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs)	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability Returnability Country of origin Offer Sustainability	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility Y FR
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability Returnability Country of origin Offer Sustainability Sustainable offer status	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility Y
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability Returnability Country of origin Offer Sustainability Sustainable offer status	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility Y FR
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability Returnability Country of origin Offer Sustainability Sustainable offer status RoHS (date code: YYWW)	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility Y FR Green Premium product
Category Discount Schedule GTIN Nbr. of units in pkg. Package weight(Lbs) Product availability Returnability Country of origin	PC21 00785901298540 1 1.22 Stock - Normally stocked in distribution facility Y FR Green Premium product Compliant - since 1208 - Schneider Electric declaration of conformity


18 months

Period

Product data sheet Presentation

140NOC78000


Presentation

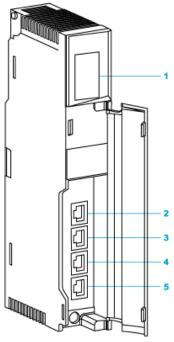

- 1 2 3
- LED display SERVICE port (ETH 1) INTERLINK port (ETH 2) DEVICE NETWORK port (ETH 3) DEVICE NETWORK port (ETH 4) 4 5

Racks for Modules Mounting

Dimensions of Modules and Racks

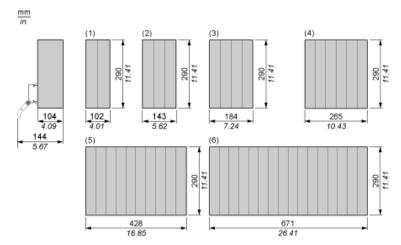

- 2 slots 3 slots (1) (2) (3)
- 4 slots
- 6 slots
- 10 slots
- (4) (5) (6) 16 slots