

Product data sheet

Characteristics

TSXDSZ08T2

TSX Micro - 8 discret output DC

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 401.00 USD



Main

Commercial Status	Commercialised
Range of product	Modicon TSX Micro automation platform
Product or component type	Discrete output module
Discrete output number	8 screw terminal block
Discrete output voltage	24 V DC
Discrete output current	0.5 mA
Discrete output logic	Positive

Complementary

Output voltage limits	19...30 V
Output current limits	0.625 A
Leakage current	<= 0.5 mA at state 0
[Ures] residual voltage	<= 0.3 V
Load impedance ohmic	48 Ohm
Response time	< 0.5 ms at state 0 < 0.5 ms at state 1
Switching frequency	< 0.6/LI ² Hz
Output overvoltage protection	By zener diode
Output short-circuit protection	Current limiter Thermal circuit breaker
Reverse polarity protection	Reverse diode on power supply
Paralleling of outputs	Yes : 2 maximum
Current consumption	38 mA
Power dissipation in W	0.15 W by channel 3.5 W by module
Isolation voltage	1500 V 1 s
Product weight	0.53 lb(US) (0.24 kg)

Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901540502
Nbr. of units in pkg.	1
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be Compliant

Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-Actuators/Outputs Connections

Wiring Diagram

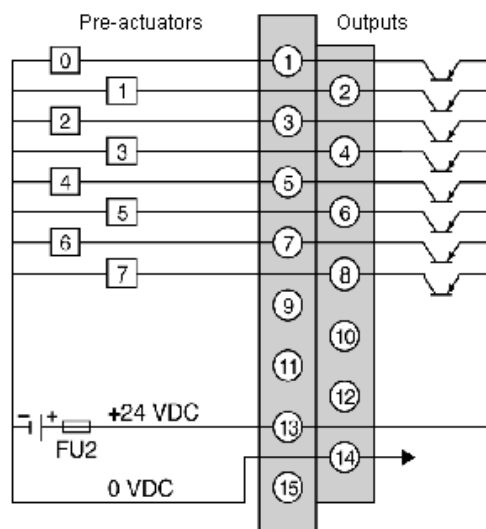

FU2 = 6.3A fuse with rapid fusion.