empty pendant control station XAC-A - 4 vertical openings



Main **Commercial Status** End of commercialisation Range of product Harmony XAC Product or component Pendant control station XACA Device short name Control station type Double insulated Enclosure material Polypropylene Electrical circuit type Control circuit Enclosure type Empty enclosure Number of cut-out 4 cut-outs Cable entry Rubber sleeve with stepped entry, cable outer diameter:

0.31...1.02 in (8...26 mm)

Without

Complementary

Control station colour	Yellow	:
Vertical operator cut-out centre	1.18 in (30 mm)	
Mechanical durability	1000000 cycles	
Product weight	1.19 lb(US) (0.54 kg)	

Guard rail

Environment

Standards	EN/IEC 60204-32				
Standards	EN/IEC 60947-5-1				
	UL 508				
	CSA C22.2 No 14				
	C3A C22.2 NO 14				
Product certifications	CCC				
	GOST				
Protective treatment	TH				
Ambient air temperature for operation	-13158 °F (-2570 °C)				
Ambient air temperature for storage	-40158 °F (-4070 °C)				
Vibration resistance	15 gn (f = 10500 Hz) conforming to IEC 60068-2-6				
Shock resistance	100 gn conforming to IEC 60068-2-27				
Overvoltage category	Class II conforming to IEC 61140				
IP degree of protection	IP65 conforming to IEC 60529				
IK degree of protection IK08 conforming to EN 50102					

Ordering and shipping details

Discount Schedule CS2 GTIN 00785901645054 Nbr. of units in pkg. 1 Returnability N Country of origin CZ	Category	22473 - PUSHBUTTON, PENDANTS	22473 - PUSHBUTTON, PENDANTS			
Nbr. of units in pkg. 1 Returnability N	Discount Schedule	CS2				
Returnability N	GTIN					
	Nbr. of units in pkg.	1				
Country of origin CZ	Returnability	N				
	Country of origin	CZ				

Warranty period


18 months

Product data sheet Dimensions Drawings

XACA04

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

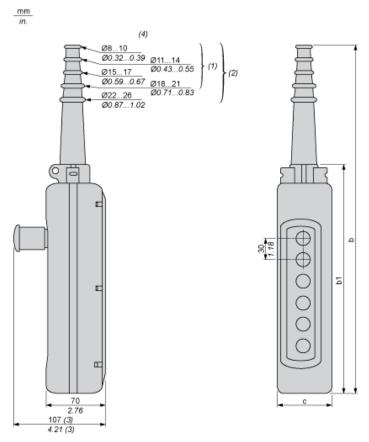

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal ø

Dimensions in mm

Number of cut-outs	2	3	4	5	6	8	12
b	314	314	440	440	500	560	680
b1	190	190	250	250	310	370	490
С	80	80	80	80	80	80	92

Dimensions in in.

Number of cut-outs	2	3	4	5	6	8	12
b	12.36	12.36	17.32	17.32	19.68	22.05	26.77
b1	7.48	7.48	9.84	9.84	12.20	14.57	19.29
С	3.15	3.15	3.15	3.15	3.15	3.15	3.62