

Product data sheet

Characteristics

ABL8REM24050

regulated SMPS - 1 or 2-phase - 100..240 V AC - 24 V - 5 A

Product availability: Stock - Normally stocked in distribution facility

Price*: 300.00 USD



Main

Commercial Status	Commercialised
Range of product	Phaseo
Product or component type	Power supply
Power supply type	Regulated switch mode
Input voltage	110...220 V DC 100...240 V AC single phase, terminal(s): N-L1 100...240 V AC phase to phase, terminal(s): L1-L2
Output voltage	24 V DC
Rated power in W	120 W
Input protection type	Integrated fuse (not interchangeable)
Power supply output current	5 A
Output protection type	Against undervoltage, protection technology: tripping if $U < 0.8 \times U_n$ Against short-circuits, protection technology: automatic reset Against overvoltage, protection technology: tripping if $U > 1.5 \times U_n$ Against overload, protection technology: $1.1 \times I_n$
Ambient air temperature for operation	32...140 °F (0...60 °C) without derating

Complementary

Input voltage limits	100...250 V 85...264 V
Network frequency	47...63 Hz
Inrush current	≤ 30 A
Cos phi	0.65
Efficiency	> 85 %
Output voltage limits	100...120 % adjustable
Power dissipation in W	21.2 W
Current consumption	1.9 A at 100 V 1.2 A at 240 V
Line and load regulation	± 3 %
Holding time	≥ 10 ms at 240 V ≥ 10 ms at 100 V
Connections - terminals	Screw type terminals output ground connection, connection capacity: $2 \times 0.14...2 \times 2.5$ mm ² AWG 26...AWG 14 Screw type terminals input ground connection, connection capacity: $1 \times 0.14...1 \times 2.5$ mm ² AWG 26...AWG 14 Screw type terminals output connection, connection capacity: $4 \times 0.14...4 \times 2.5$ mm ² AWG 26...AWG 14 Screw type terminals input connection, connection capacity: $2 \times 0.14...2 \times 2.5$ mm ² AWG 26...AWG 14
Marking	CE
Mounting support	35 x 15 mm symmetrical DIN rail 35 x 7.5 mm symmetrical DIN rail 75 x 7.5 mm symmetrical DIN rail

Operating position	Vertical
Output coupling	Parallel Series
Name of test	Conducted/Radiated emissions conforming to EN 55022 Class B Conducted/Radiated emissions conforming to EN 55011 Emission conforming to EN 50081-1 Surge conforming to EN/IEC 61000-4-5 Rapid transient conforming to IEC 61000-4-4 Radiated electromagnetic field conforming to EN/IEC 61000-4-3 Primary outage conforming to IEC 61000-4-11 Induced electromagnetic field conforming to EN/IEC 61000-4-6 Electrostatic discharges conforming to EN/IEC 61000-4-2
Status LED	1 LED orange input voltage 1 LED green output voltage
Depth	4.72 in (120 mm)
Height	4.72 in (120 mm)
Width	2.13 in (54 mm)
Product weight	2.2 lb(US) (1 kg)

Environment

Product certifications	CCSAus CSA 22-2 No 950-1 C-Tick CULus 508 TUV 60950-1
Environmental characteristic	Safety conforming to SELV Safety conforming to EN/IEC 60950 EMC conforming to EN/IEC 61000-6-2 EMC conforming to EN 50082-2 EMC conforming to EN 50081-1
IP degree of protection	IP20 conforming to EN/IEC 60529
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	0...95 % without condensation or dripping water
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	500 V between outputs 500 V between output and ground 3000 V between input and output 3000 V between input and ground

Ordering and shipping details

Category	22525 - ABL8 AND ABL7 POWER SUPPLIES
Discount Schedule	CP12
GTIN	00785901478089
Nbr. of units in pkg.	1
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	CN


Contractual warranty

Warranty period	18 months
-----------------	-----------

Regulated Switch Mode Power Supply


Dimensions and Mounting

Mounting on 35 mm/1.37 in. or 75 mm/2.95 in. Rail



Regulated Switch Mode Power Supply


Internal Wiring Diagram



Regulated Switch Mode Power Supplies


Series or Parallel Connection

Series Connection



(1) Two Schottky diodes I_{min} = power supply I_n and V_{min} = 50 V

Parallel Connection



Family	Series	Parallel
ABL 8REM/7RP	2 products max.	2 products max.

Series or parallel connection is only recommended for products with identical references.


Regulated Switch Mode Power Supplies

Derating

The ambient temperature is a determining factor that limits the power an electronic power supply can deliver continuously. If the temperature around the electronic components is too high, their life will be significantly reduced.

The nominal ambient temperature for the Optimum range of Phaseo power supplies is 50 °C. Above this temperature, derating is necessary up to a maximum temperature of 60 °C.

The graph below shows the power as a percentage of the nominal power that the power supply can deliver continuously, depending on the ambient temperature.

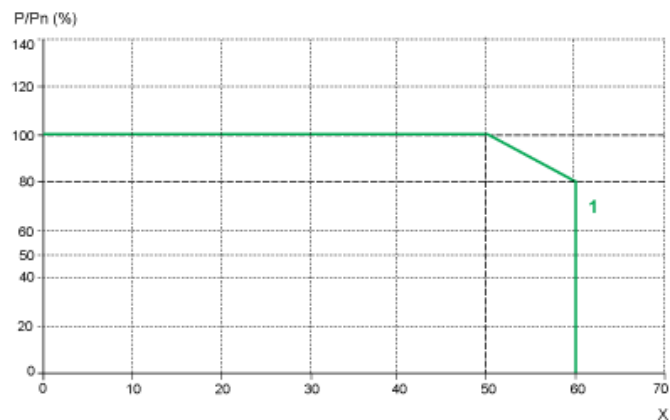

X Maximum operating temperature (°C)


(1) ABL 8REM, ABL 7RP mounted vertically

Derating should be considered in extreme operating conditions:

- Intensive operation (output current permanently close to the nominal current, combined with a high ambient temperature)
- Output voltage set above 24 Vdc (to compensate for line voltage drops, for example)
- Parallel connection to increase the total power

Regulated Switch Mode Power Supply

Load Limit

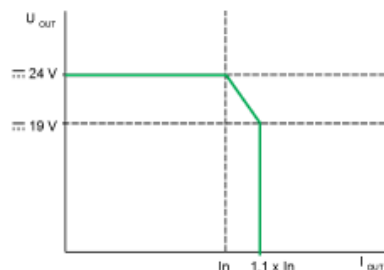

Regulated Switch Mode Power Supply

Temporary Overloads

