


Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 66.00 USD

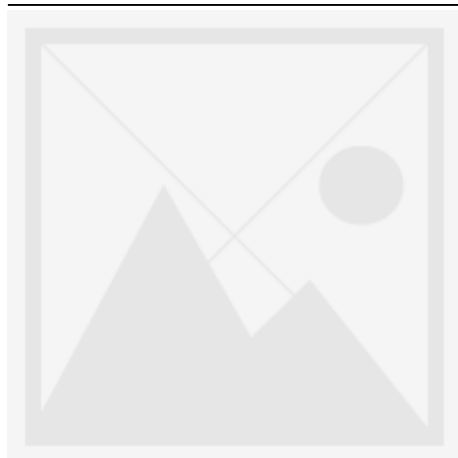

Main

Bezel material	Chromium plated metal
Control button type	Standard push-button
Device short name	K
Enclosure type	Weatherproof enclosure dust and oil resistant indoor/outdoor
Light source	Without
Mounting diameter	1.18 in (30 mm)
Operator additional information	Without guard

Complementary

Line Rated Current	10 A
Cap/Operator or lens colour	Yellow
Contact operation	Standard fingersafe
Contacts type and composition	1 NO
Control type	Push-button
Electrical connection	Screw clamp terminal
Light block supply	Without supply
Marking	Unmarked
Mounting support	Panel
Operator position information	2 positions
Operator profile	1 projecting push-button
Permissible voltage	<= 600 V
Shape	Round head
Type of operator	Momentary
Utilisation category	DC-13 AC-15


Environment

NEMA degree of protection	NEMA 1/2/3/3R/4/6/12/13
Product certifications	CE CSA LR24590 class 3211 03 UL listed file E42259 CCN NKCR

Ordering and shipping details

Category	21426 - 9001 K (NOT KA,KM,KX)
Discount Schedule	CS1
GTIN	00785901769231
Nbr. of units in pkg.	1
Package weight(Lbs)	0.5
Returnability	N
Country of origin	MX

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 0921 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------