


Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 1205.00 USD

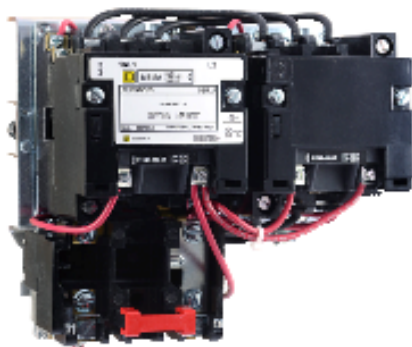

Main

Product or component type	Starter
Range of product	S
Control circuit	Separate control circuit

Complementary

[Uc] control circuit voltage	110 V AC 50 Hz 120 V AC 60 Hz
Motor starter type	Reversing
Motor type	Repulsion induction
Poles description	3P
Phase	1 phase
Wiring mode	4 wires
Line Rated Current	27 A
Rated power in HP	3 HP 230 V AC 2 HP 115 V AC
System Voltage	600 V AC
Control units	No control units
Thermal overload type	Melting alloy 1 Thermal Units
Electrical connection	Screw clamp terminals
NEMA size	1
Height	9.21 in (234 mm)
Depth	5.31 in (135 mm)
Width	5.39 in (137 mm)

Environment

NEMA degree of protection	Not rated (open device)
---------------------------	-------------------------

Installation direction	Vertical
Product certifications	NEMA CSA UL listed

Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901021766
Nbr. of units in pkg.	1
Package weight(Lbs)	7.9500000000000002
Returnability	N
Country of origin	MX

Offer Sustainability

RoHS (date code: YYWW)	Will be compliant on 3Q2014 Will be compliant on 3Q2014
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------