


Product data sheet

Characteristics

8910DPA14V02Y392

8910DPA definite purpose contactor, 20 A, 4P,
110/120 V 50/60 Hz coil, open, 2 NO and 2 NC

Product availability: Stock - Normally stocked in distribution facility

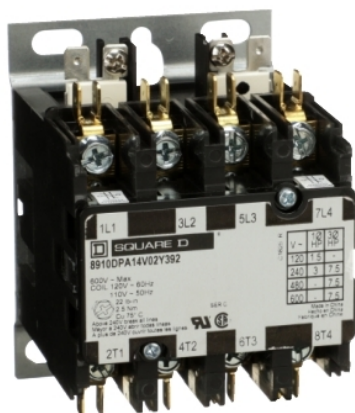

Main

Product or component type	Definite Purpose Contactor
Line Rated Current	20 A
Number of Poles	4P
Pole contact composition	2 NO + 2 NC
Range of product	DPA

Complementary

Maximum Horse Power Rating	1.5 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase 7.5 Hp 230 V AC, 3 phase 7.5 Hp 460 V AC, 3 phase 7.5 hp 575 V AC, 3 phase
Locked rotor rated current	100 A 460 V AC 80 A 575 V AC 120 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	3 phase
Electrical connection	Binder head Quick connect terminals

Environment

Product certifications	UL recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21341 - 8910 DPA 1_(20 AMP)
Discount Schedule	CP1B
GTIN	00785901025221
Package weight(Lbs)	0.60 kg (1.32 lb(US))
Returnability	Yes
Country of origin	CN

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals which are known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------