


Product availability: Non-Stock - Not normally stocked in distribution facility

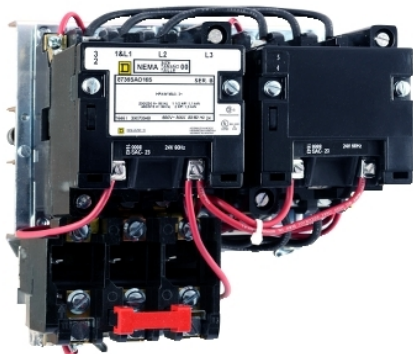

### Main

Product	Starter
Type	S
Control Circuit Type	Common control circuit

### Complementary

Control Circuit Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Starter Type	Reversing
Number of Poles	3P
Phase	3 phase
Current Rating	27 A
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Melting alloy 3
Electrical connection	Screw clamp terminals
NEMA size	1
Height	6.93 in (176 mm)
Depth	5.31 in (135 mm)
Width	7.13 in (181 mm)


### Environment

Enclosure Type	Not rated (open device)
Orientation	Horizontal
Product certifications	NEMA CSA UL listed

### Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901872719
Package weight(Lbs)	3.47 kg (7.65 lb(US))
Returnability	No
Country of origin	MX

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

Contractual warranty

Warranty	18 months
----------	-----------