
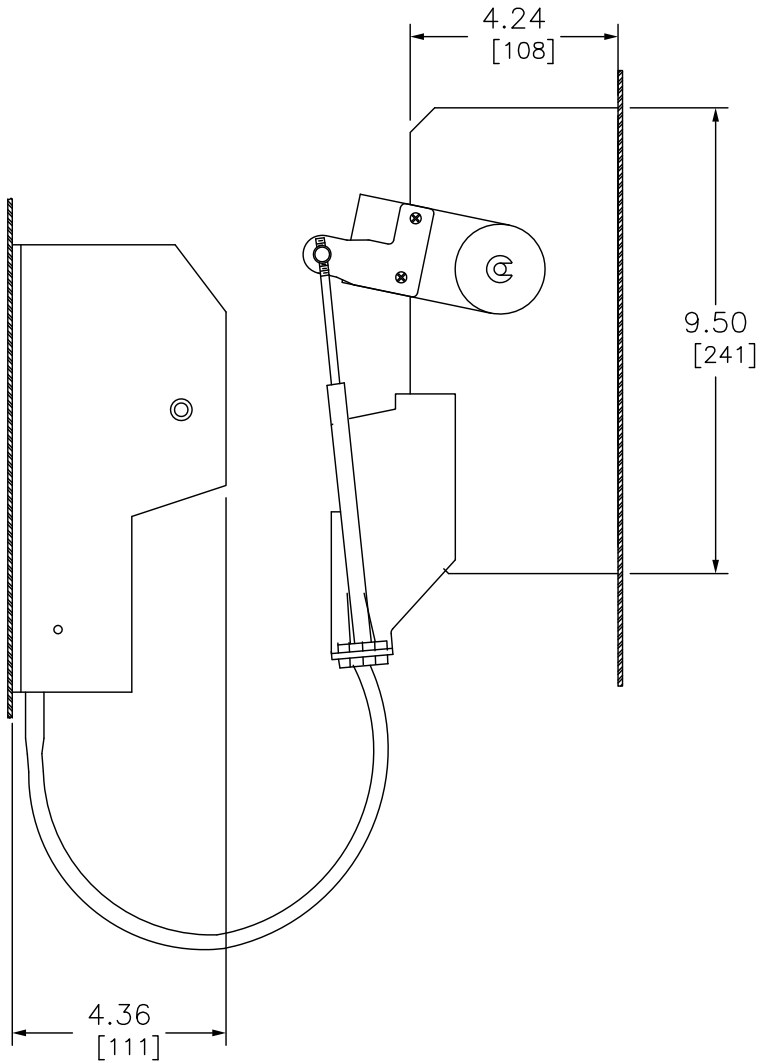


CABLE MECHANISMS FOR USE WITH CLASS 9422
TYPE NSJ 3 POLE CIRCUIT BREAKER.

TYPE	CABLE LENGTH	MAXIMUM BOX DEPTH	MAXIMUM DISTANCE FROM TOP RIGHT MOUNTING HOLE TO UPPER MOUNTING HOLE FOR HANDLE OPERATOR (DIM C)	
			MINIMUM C	MAXIMUM C
CSJ30	36"	24"	3.75"	7"
CSJ50	60"	36"	3.75"	24"
CSJ10	120"	36"	3.75"	5 FEET

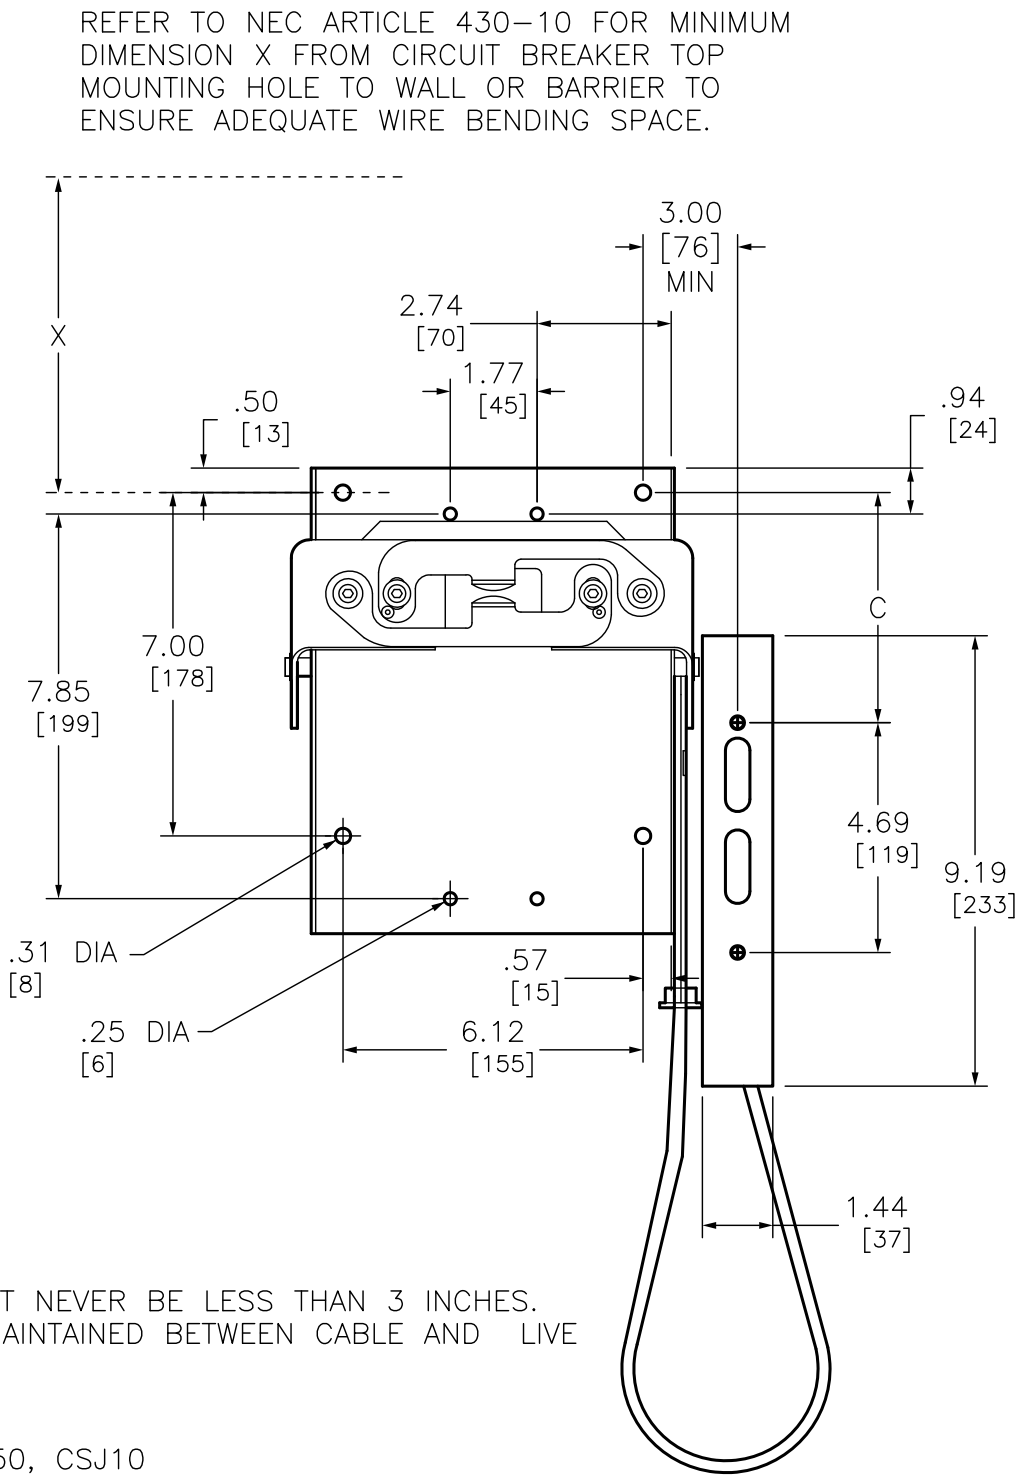

NOTE: BEND RADIUS IN CABLE MUST NEVER BE LESS THAN 3 INCHES.
ELECTRICAL CLEARANCES MUST BE MAINTAINED BETWEEN CABLE AND LIVE ELECTRICAL PARTS.

Catalog Number: 9422-CSJ30, CSJ50, CSJ10
Ratings: —
UL File/Guide: E62922/DIHS2
CSA File/Guide: —
Meets Standards: —
Weight: 8.5 lbs
Wire Size: —
Terminal torque: —
Mounting Hwd.: (8) #14-20 screws

DUAL DIMENSIONS: INCHES
MILLIMETERS

OPERATING MECHANISM CABLE MECHANISM NEMA



DWG# 9422CSJ30
NO.