


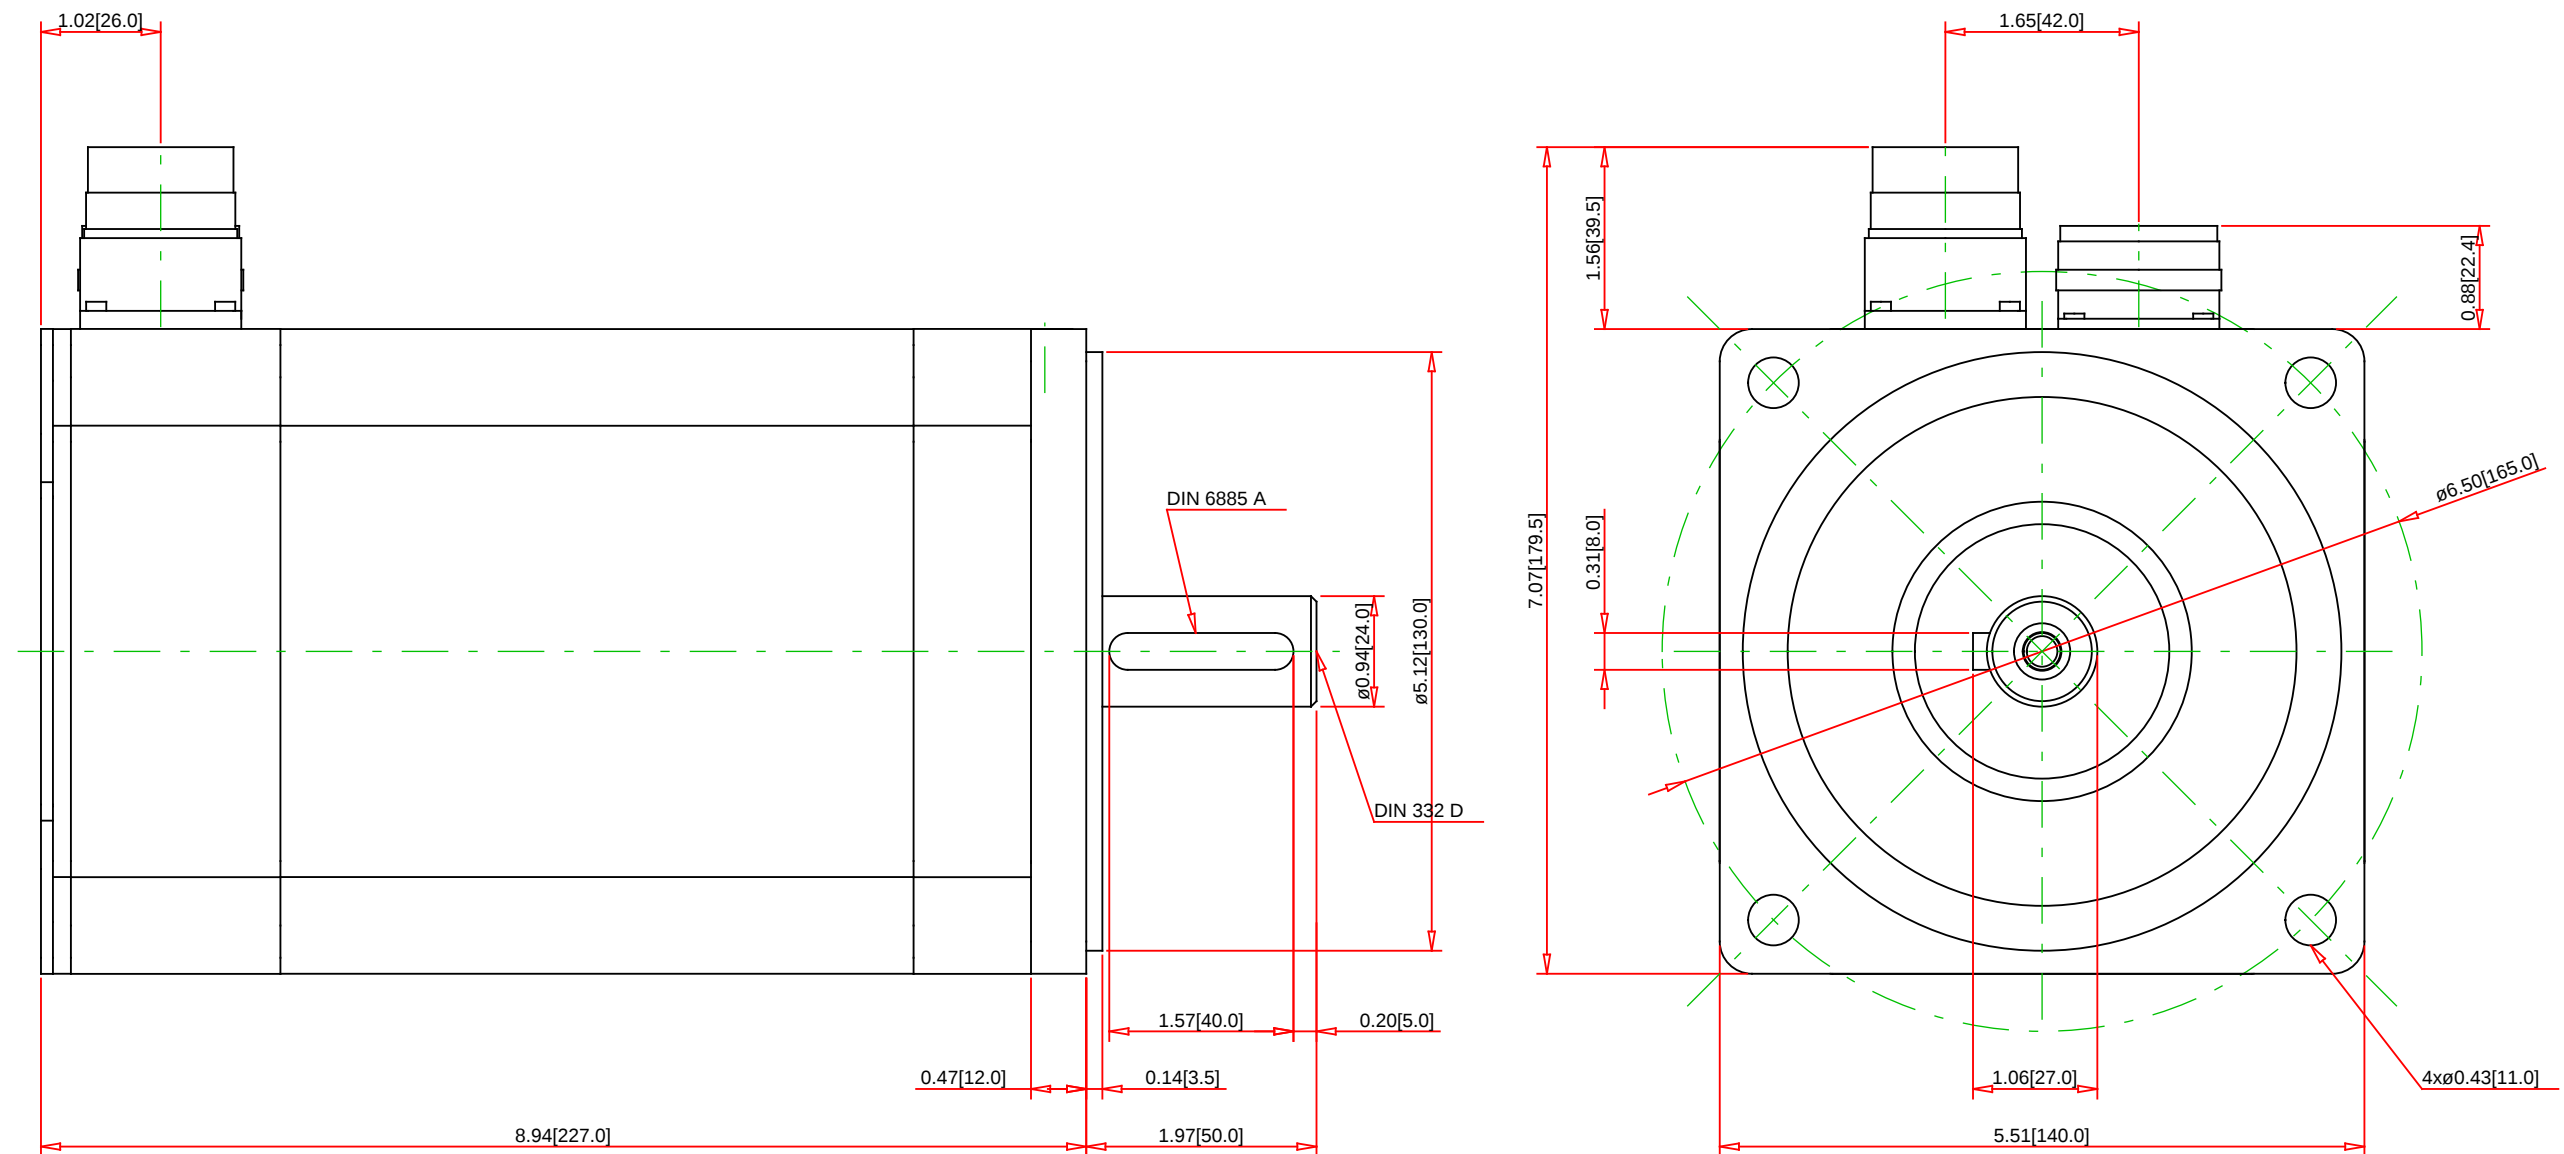

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMH1402P12F2A

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:	
Frame Size (mm):	140
Degree of Protection (Shaft / housing):	IP54 / IP65
Maximum Current (Arms):	57.42
Holding brake:	Yes
Encoder Type:	ABS Multi turn 128 Sin/Cos period
Torque Constant (Nm/A):	1.1
CSA:	Yes
RoHS:	Yes
Weight without brake (kg / lb):	23.46 / 12

Specification:	
Description:	
Family:	BMH
Maximum Permissible Speed (rpm):	4000
Continuous Stall Torque (Nm / lbs-in):	18.5 / 163.4
Peak Torque (Nm / lbs-in):	55.5 / 491.2