


Product data sheet

Characteristics

8911DPSO23V06

Starter, Definite Purpose, nonreversing, 25A,
3 pole, 3 phase, 480 VAC coil, melting alloy
overload, open style

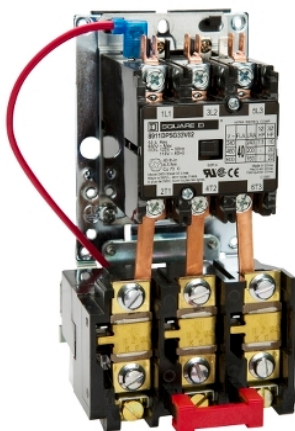

Main

Product	Definite Purpose Starter
Ampere Rating	25 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Phase	3 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	150 A 230 V AC 125 A 460 V AC 100 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901556695
Nbr. of units in pkg.	1
Package weight(Lbs)	2.26 lb(US) (1.03 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Package 1 Height	5.00 in (12.700 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	7.80 in (19.812 cm)

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------