


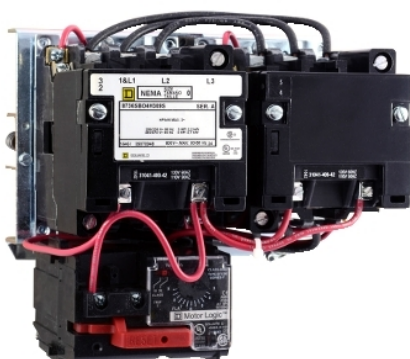

Main

Product	Starter
Type	S
Control Circuit Type	Separate control circuit

Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Starter Type	Reversing
Number of Poles	3P
Phase	3 phase
Current Rating	27 A
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Solid state Motor Logic class 10/20
Electrical connection	Screw clamp terminals
NEMA size	1
Maximum Height	6.93 in (176 mm)
Maximum Depth	5.31 in (135 mm)
Maximum Width	7.13 in (181 mm)

Environment

Enclosure Type	Not rated (open device)
Orientation	Horizontal
Product certifications	NEMA CSA UL Listed

Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901944256
Package weight(Lbs)	7.58 lb(US) (3.44 kg)
Returnability	No
Country of origin	MX

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Not compliant
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------