


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

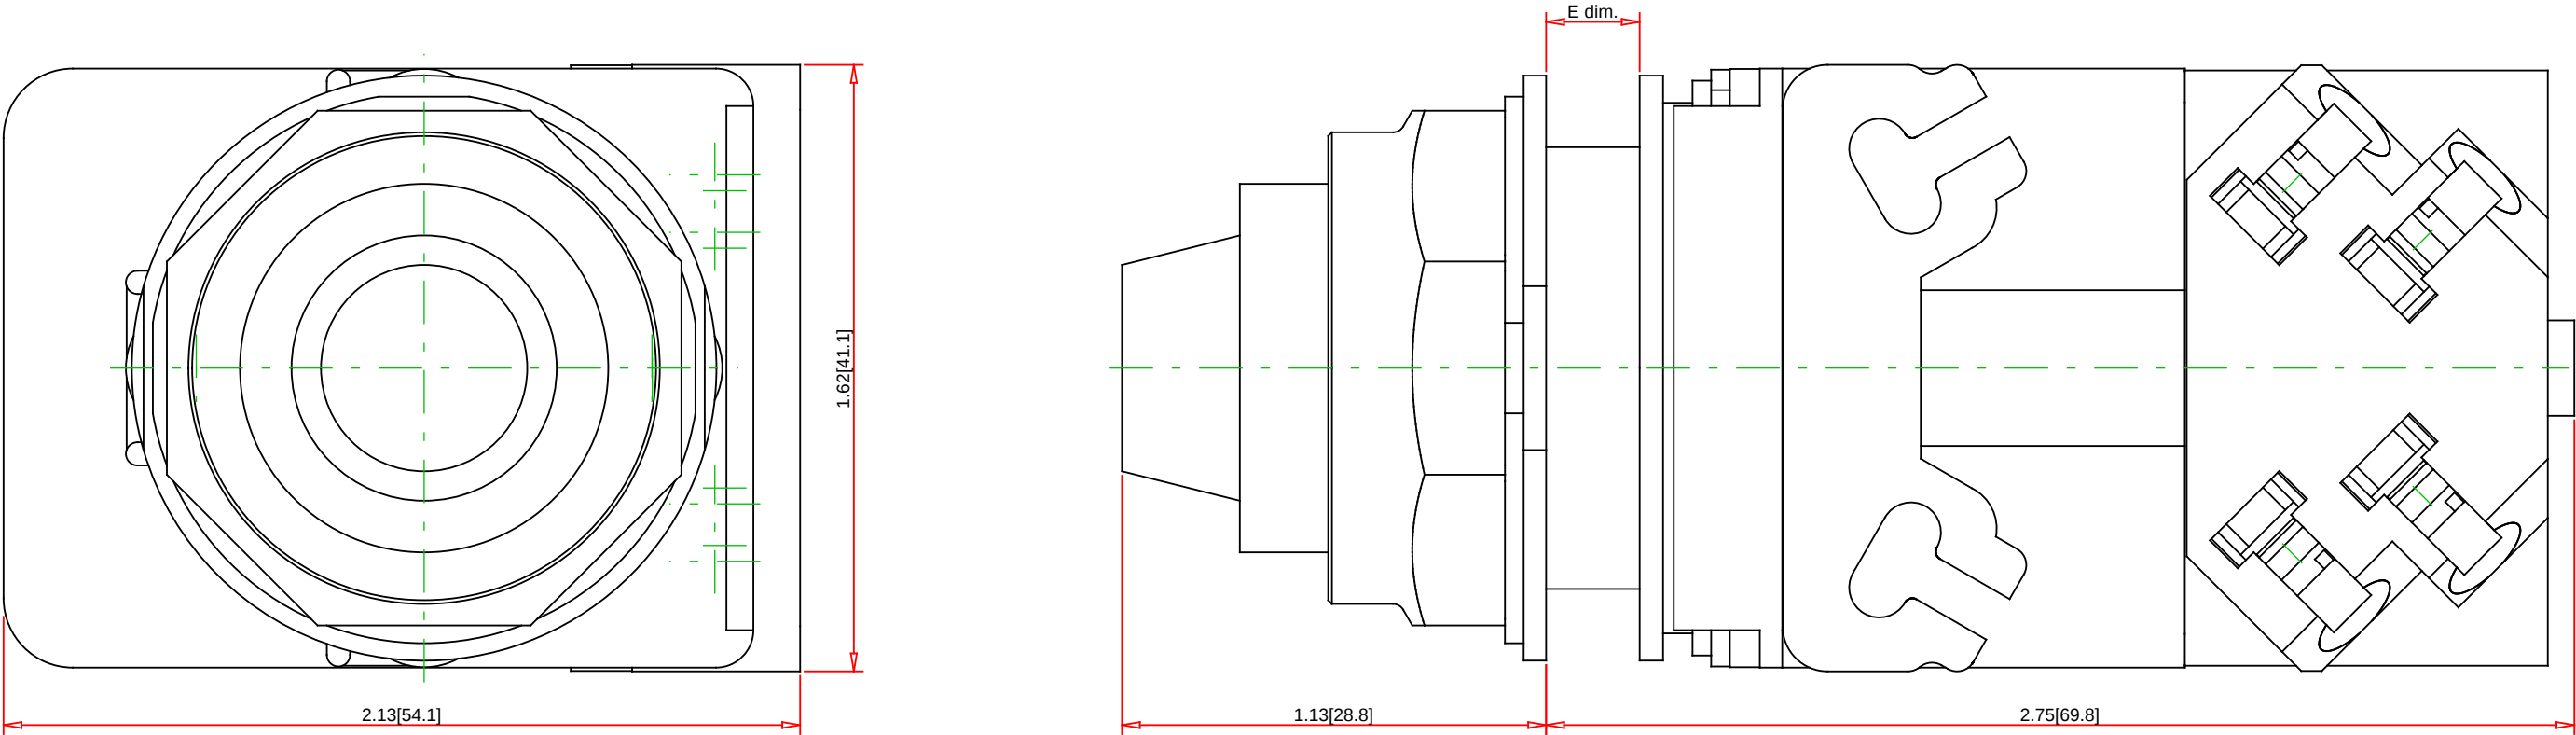

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9001KT1LRR31

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL File:

E78403 CCN NKCR

CSA File:

LR24590 Class 3211-03

CE Marked:

Yes

RoHS:

Yes

NEMA / IP Rating:

NEMA 1/2/3/3R/4/6/12/13 Water tight, Dust tight and Oil tight (Indoor/Outdoor), IP66

Key Number:

n/a

Key Removal:

n/a

Light Module Supply Voltage:

110/120VACat50/60Hz

Light Module Type:

LED (Red)

Number of Operators:

n/a

Description:
30mm Pilot Light

Ring Nut Material:

Chromium Plated Zinc

Operator Type:

Push-To-Test

Operator Action:

n/a

Button Type:

n/a

Guard Type:

n/a

Button/Cap Color:

n/a

Lens Type:

Plastic (Fresnel)

Lens Color:

Red

Knob Type:

not applicable

Knob Color:

n/a

Number of Positions:

n/a

Specification: