


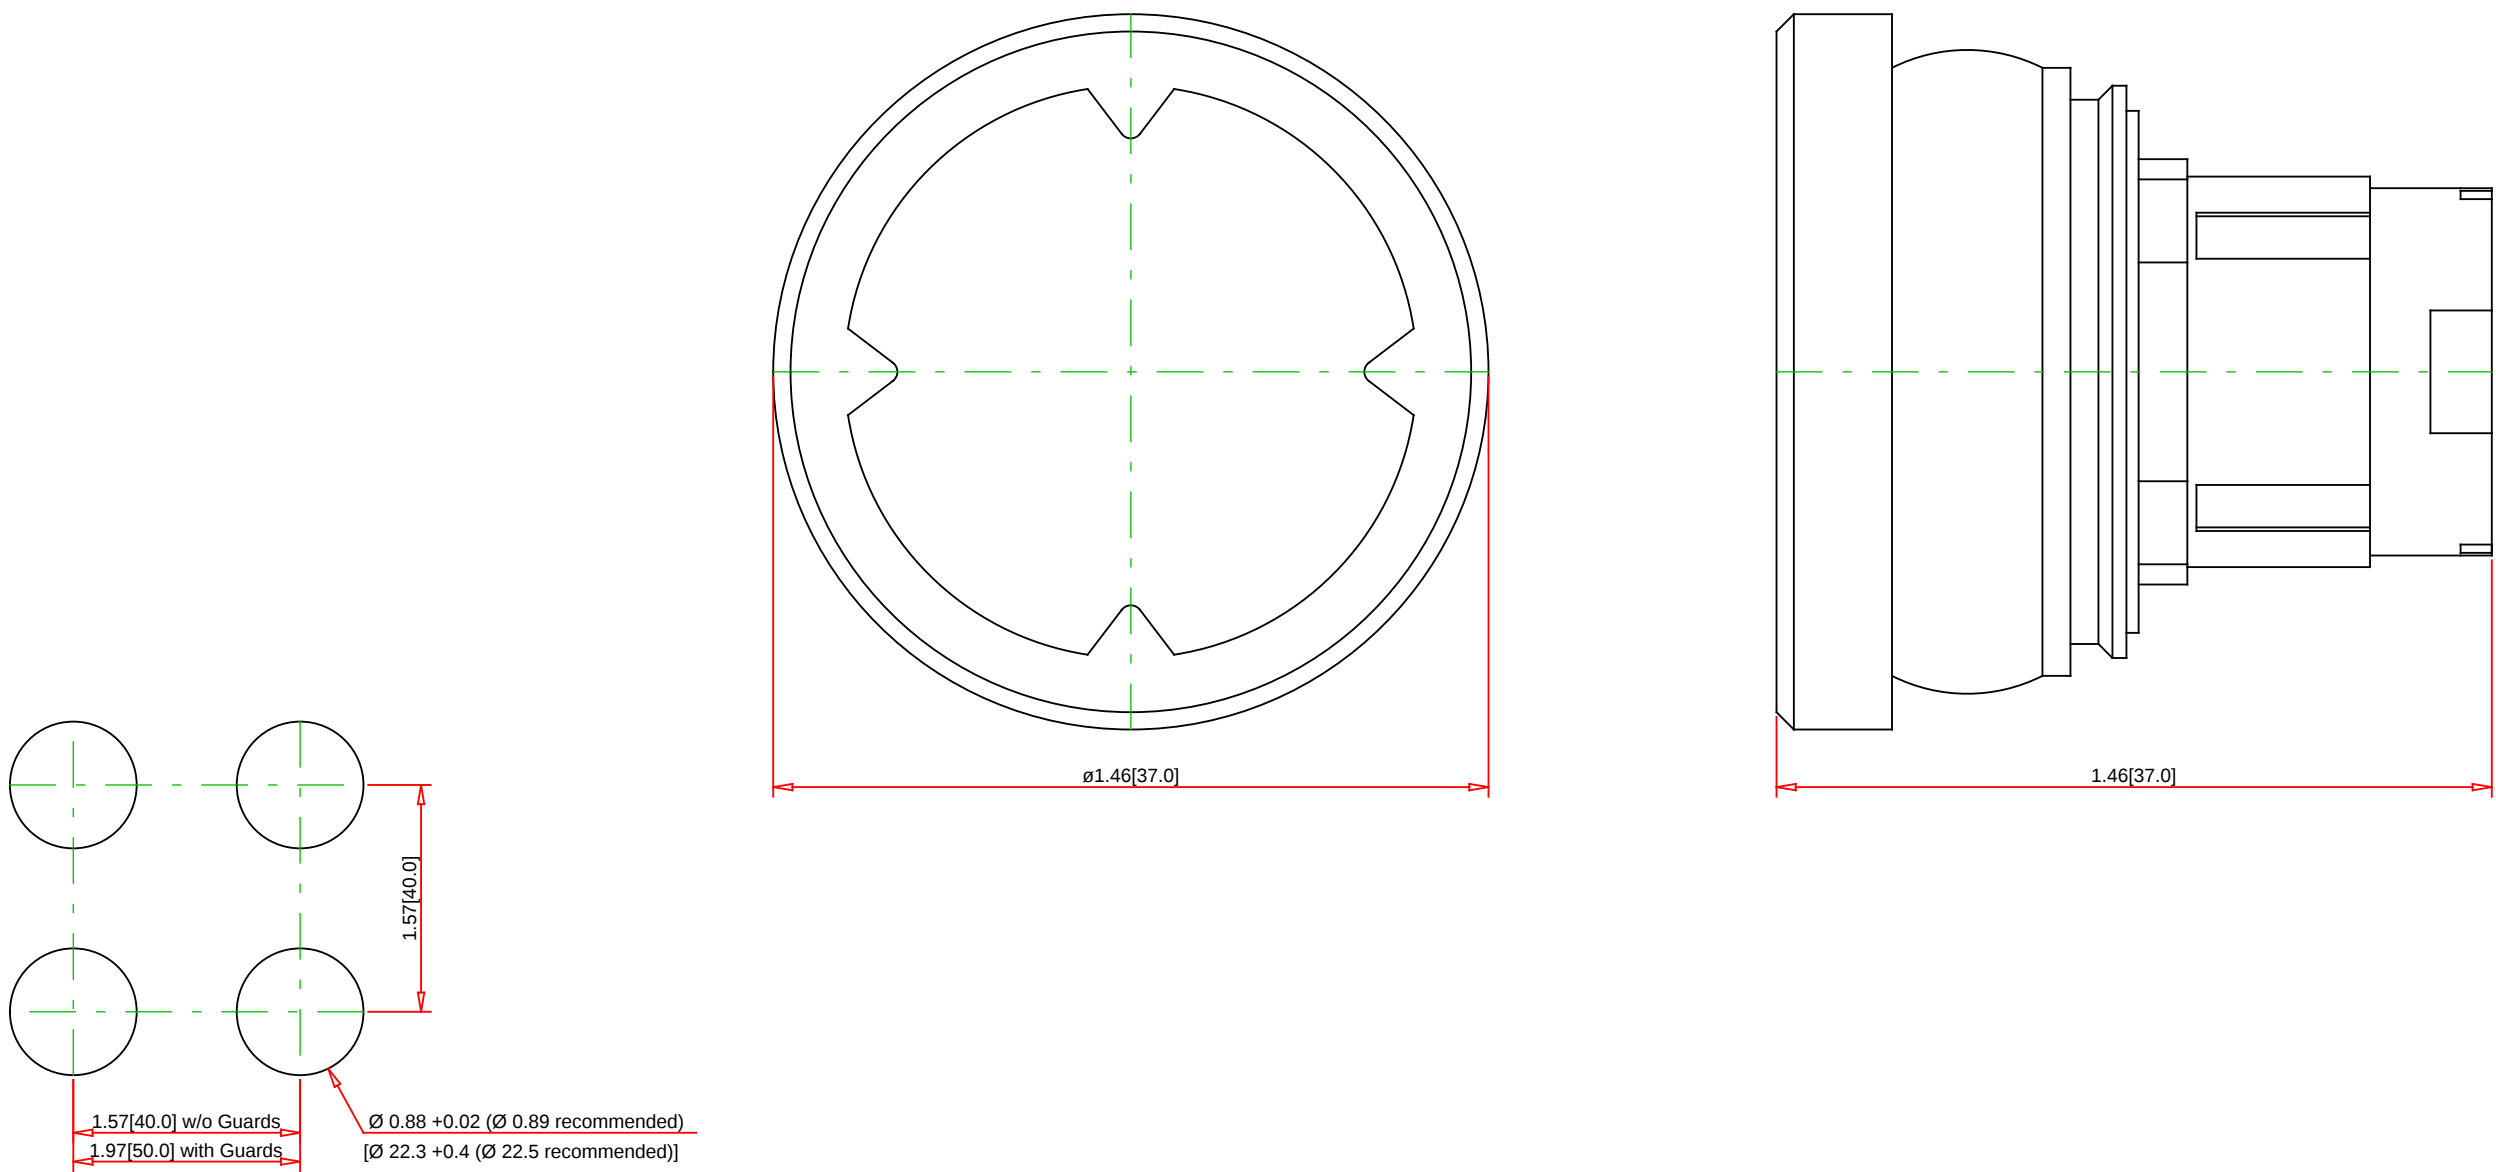

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
ZB4BC38030RA

Schneider Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL Cert.: E164353 CCN NKCR
CSA Cert.: LR44087 Class 3211 03
CE Cert.: CE per IEC
IP Protection: P 66 IP 69K
NEMA Protection: NEMA 4, 12, 13
IK Protection: IK03
Ambient Air Temp. (for storage): -40 to +85 °C
Ambient Air Temp. (for operation): -40 to +70 °C
Electric Shock Protection: Class I
Washdown Resistance (in Pa): 90 Pa

Specification:

Description: 22MM HARSH PB, GREEN, W/ MARKING, ROTATE 90°
Mechanical Durability (in operating cycles): 3000000
Vibration Resistance: 5 gn
Mechanical Shock Resistance: 30 gn
Color: Green
Button Marking: w/, rotate 90°