



### Main

Range of product	OsiSense XM
Pressure sensor type	Electromechanical pressure sensor
Pressure sensor name	FYG
Pressure sensor size	101.53 psi (7 bar)
Fluid connection type	G 1/4 (female) ISO 228
Controlled fluid	Fresh water 32...158 °F (0...70 °C) Sea water 32...158 °F (0...70 °C)
Cable entry	2 cable entries with grommet
Contacts type and composition	2 NC snap action
Product specific application	-
Pressure switch type of operation	Regulation between 2 thresholds
Line Rated Current	10 A 250 V AC EN 60730-1
Electrical connection	Screw-clamp terminals 1 x 1...2 x 2 mm <sup>2</sup>
Short-circuit protection	20 A cartridge fuse gG
Scale type	Adjustable differential
Setting	Internal
Local display	Without
Electrical circuit type	Power circuit

### Complementary

Materials in contact with fluid	Nylon 6/6 Nitrile Zinc plated steel
Enclosure material	PS
Operating position	Any position
Motor power kW	0.75 KW 1 hp 110 V AC, 1 phase 1.1 KW 1.5 hp 110 V AC, 3 phase 1.5 KW 2 hp 230 V AC, 1 phase 1.5 KW 2 hp 400 V AC, 1 phase 2.2 KW 3 hp 230 V AC, 3 phase 2.2 kW 3 hp 400 V AC, 3 phase
Adjustable range of switching point on falling pressure	7.25...78.32 psi (0.5...5.4 bar)
Adjustable range of switching point on rising pressure	40.61...101.53 psi (2.8...7 bar)
Possible differential minimum at low setting	17.40 psi (1.2 bar)
Possible differential minimum at high setting	23.21 psi (1.6 bar)
Possible differential maximum at low setting	33.36 psi (2.3 bar)
Possible differential maximum at high setting	39.16 psi (2.7 bar)
Maximum permissible accidental pressure	217.56 psi (15 bar)
Maximum permissible pressure - per cycle	126.91 psi (8.75 bar)
Destruction pressure	290.08 psi (20 bar)
Pressure actuator	Diaphragm
Electrical durability	100000 cycles 10 cyc/mn
Mechanical durability	1000000 cycles
Terminal block type	4 terminals
Possible differential minimum at middle setting	20.31 psi (1.4 bar)

Possible differential maximum at middle setting	36.26 psi (2.5 bar)
Maximum operating rate	10 cyc/mn
[Ui] rated insulation voltage	500 V EN/IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV EN/IEC 60947-1
Net Weight	0.75 lb(US) (0.34 kg)
Repeat accuracy	2 %
Terminals description ISO n°1	(3-4)NC (1-2)NC
Maximum Depth	4.02 in (102 mm)
Maximum Height	3.70 in (94 mm)
Maximum Width	2.83 in (72 mm)

## Environment

Standards	CE EN/IEC 60730
Ambient air temperature for operation	32...113 °F (0...45 °C)
Ambient air temperature for storage	-22...176 °F (-30...80 °C)
Protective treatment	TC
Electrical shock protection class	Class I IEC 536
IP degree of protection	IP20 EN/IEC 60529

## Ordering and shipping details

Category	18407-WORLD SERVICE PARTS(SENSORS)
Discount Schedule	T
GTIN	03389110524468
Package weight(Lbs)	1.01 lb(US) (0.460 kg)
Returnability	No
Country of origin	MX

## Packing Units

Package 1 Height	0.720 dm
Package 1 width	1.030 dm
Package 1 Length	1.050 dm


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

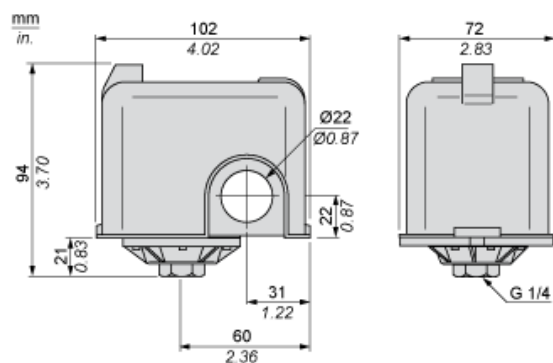


---

Wiring Diagram


---

Connections




## Curves

### Operating Curves



- (y) Rising pressure
- (x) Falling pressure
- 1 : Maximum differential
- 2 : Minimum differential



- (y) Pressure
- (x) Time
- (1) Adjustable value