
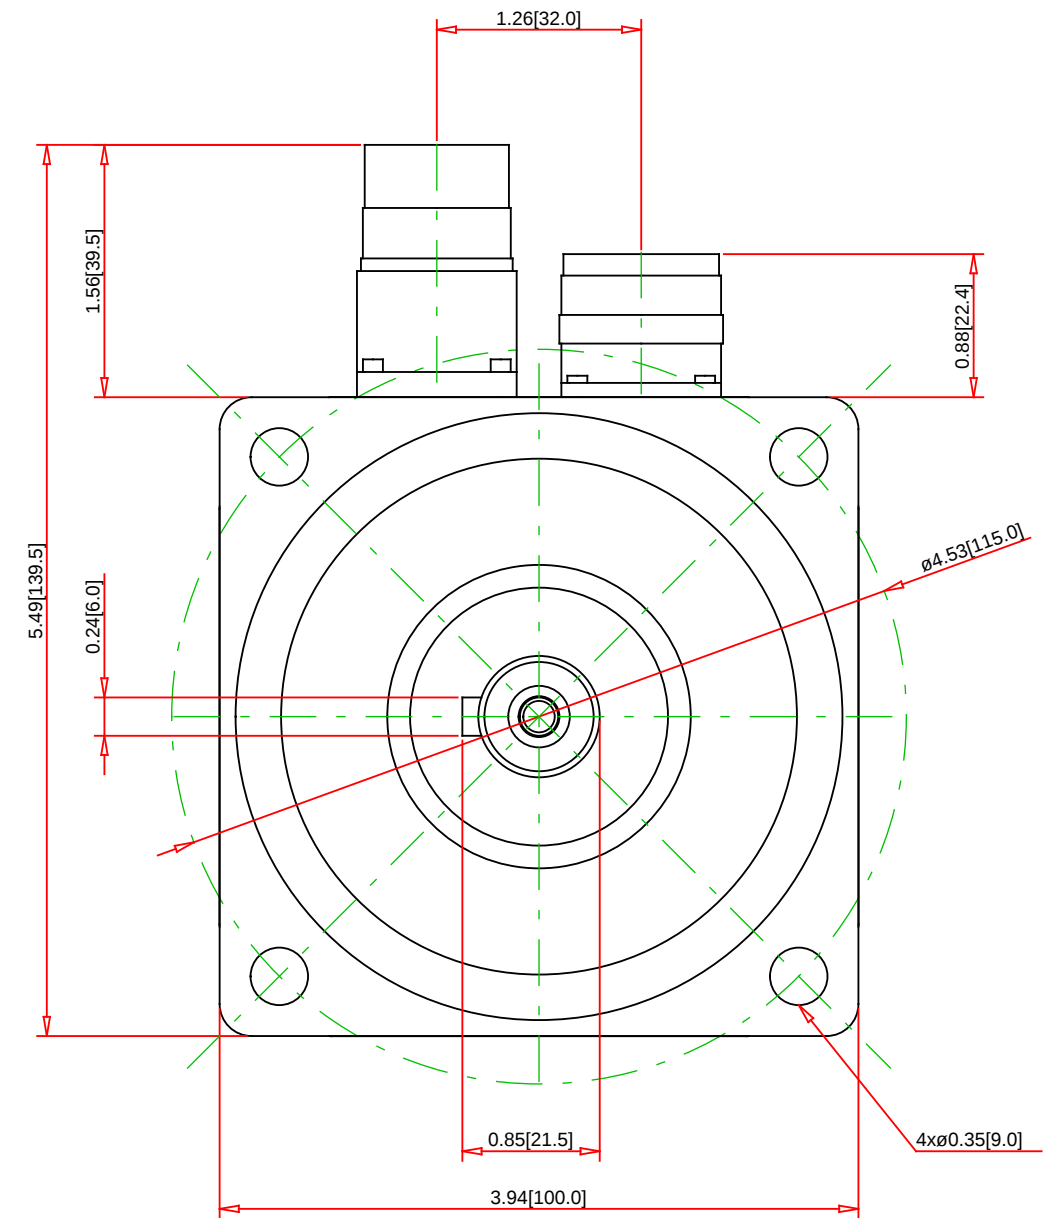


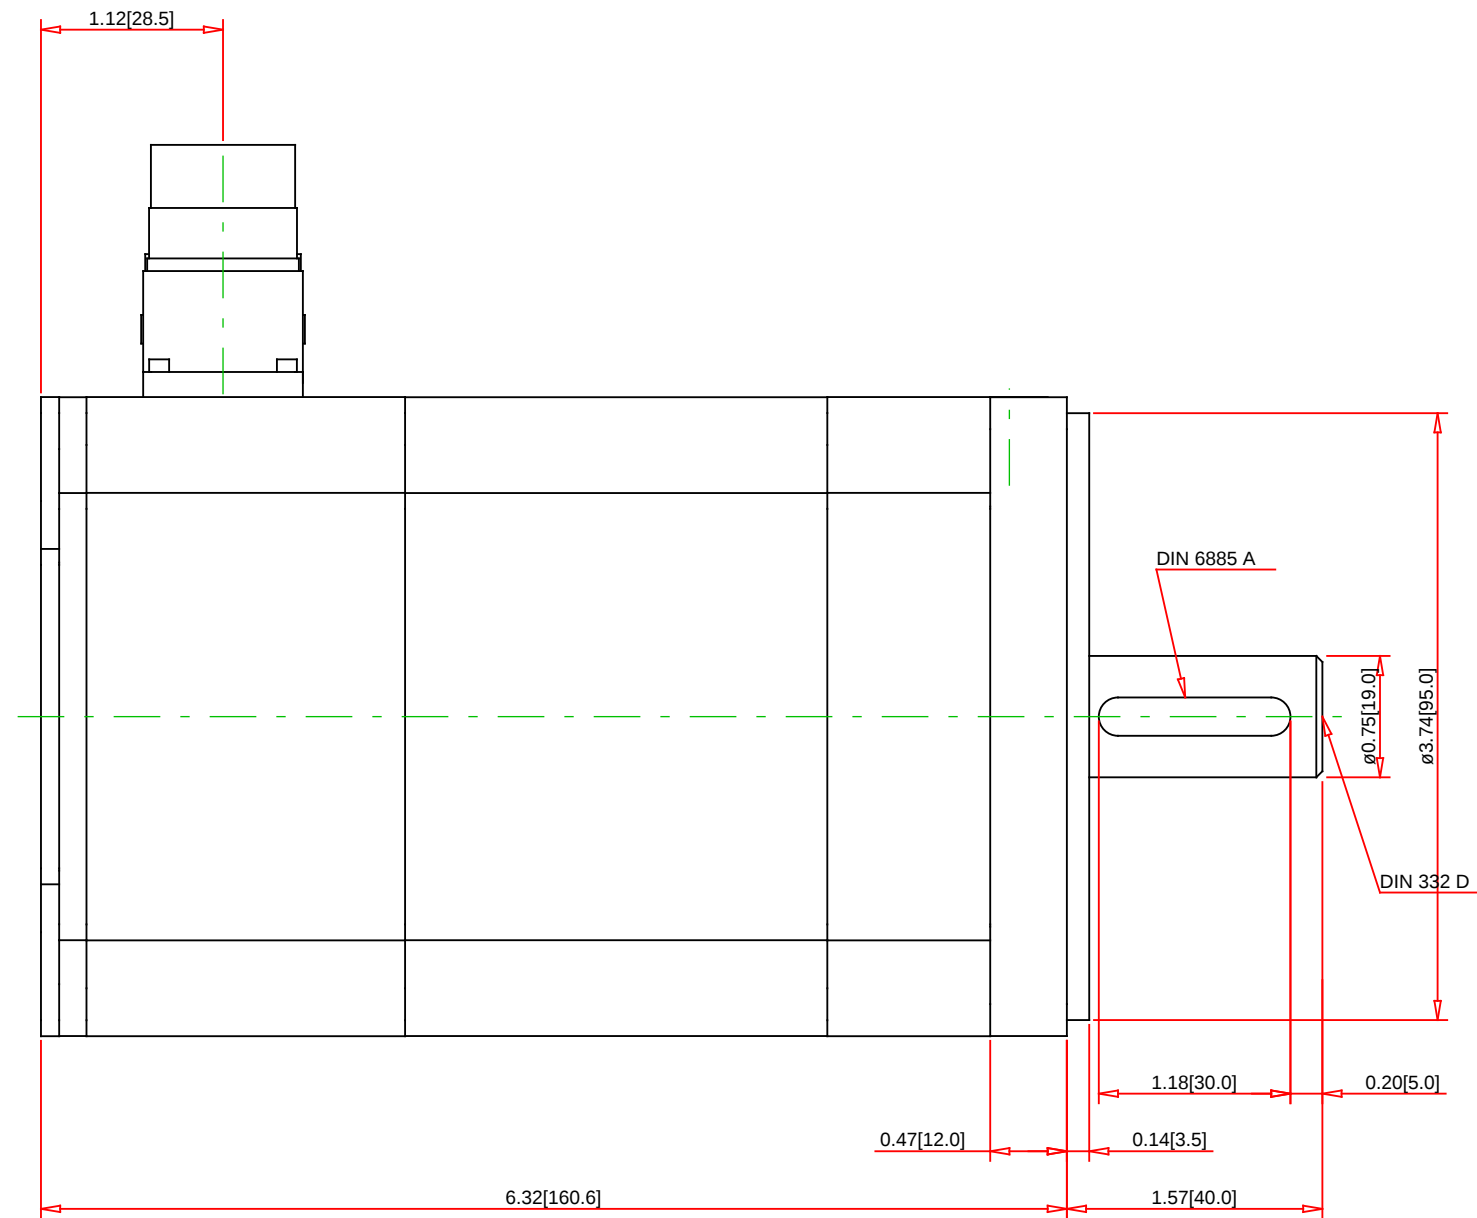

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMH1002T07A2A

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:
Frame Size (mm): 100
Degree of Protection (Shaft / housing): IP54 / IP65
Maximum Current (Arms): 30
Holding brake: No
Encoder Type: ABS Multi turn 16 Sin/Cos period
Torque Constant (Nm/A): 0.71
CSA: Yes
RoHS: Yes
Weight without brake (kg / lb): 10.85 / 4.92

Description:
Family: BMH
Maximum Permissible Speed (rpm): 6000
Continuous Stall Torque (Nm / lbs-in): 6.1 / 54
Peak Torque (Nm / lbs-in): 18.3 / 162

Specification: