

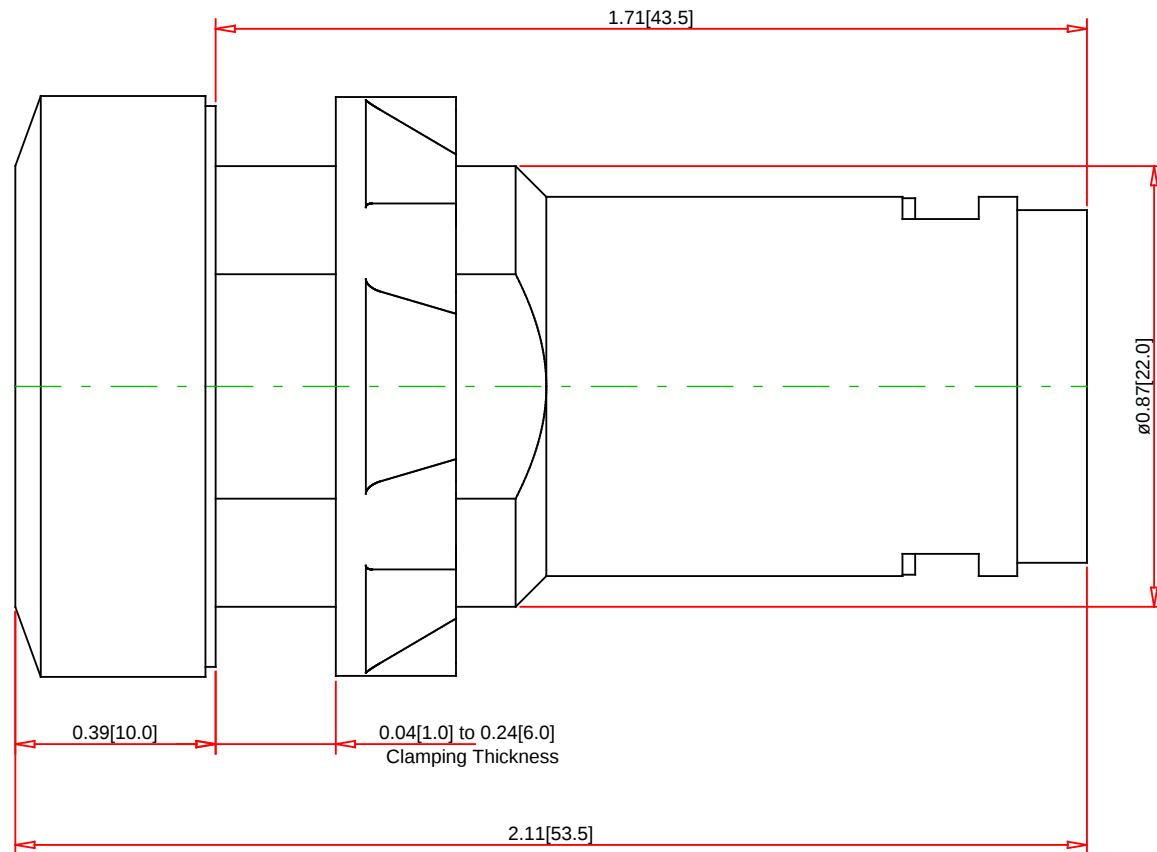
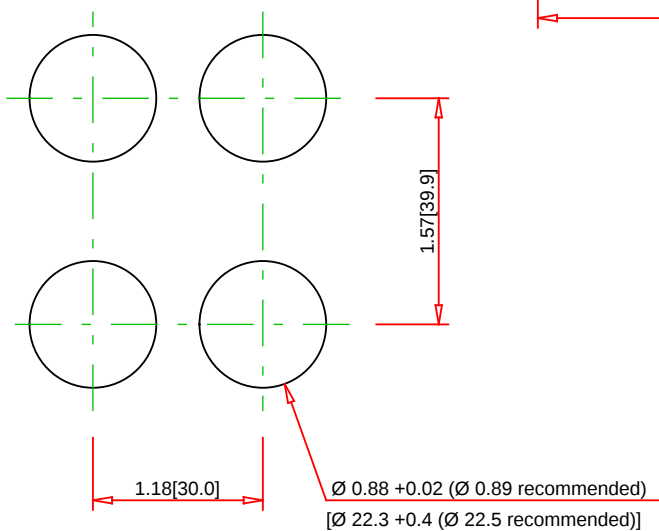


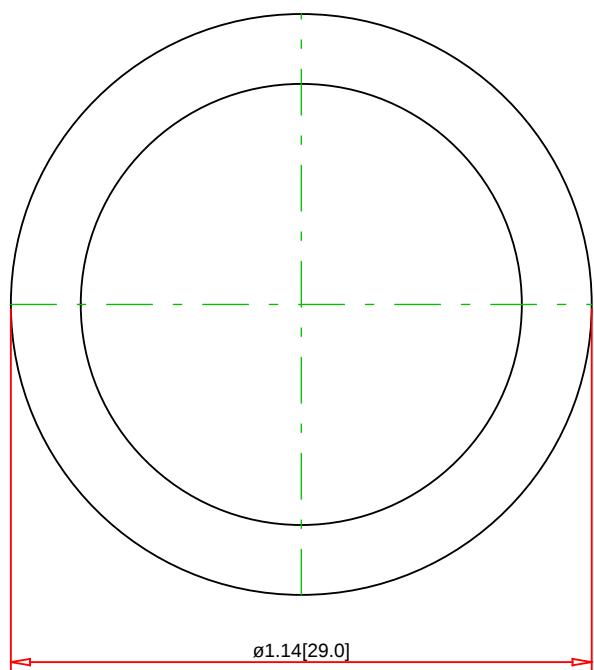

Part No.:

XB5EVM1

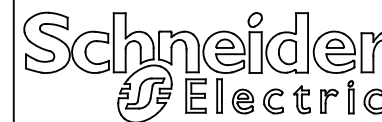

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Technical Information:

Supply Voltage (Input):	230-240VAC 50/60Hz
Supply Voltage Limits:	195-264 VAC
Current Rating:	14mA
Surge Withstand:	1 kV conforming to IEC 61000-4-5
Bulb Type:	Protected and Integrated LED
Ambient Air Temp. (for storage):	-40°C to 70°C
Ambient Air Temp. (for operation):	-25°C to 70°C
Conformity to Standards:	EN/IEC 60947-1, EN/IEC 60947-5-1, UL508, CSA C22-2 n°14, IEC 61000-4-2, IEC 61000-4-3, IEC 6100-4-4, UL, FCC, CSA, CE

Specification:

Description:	22mm Monolithic Pilot light, complete, 230V, White
Vibration Resistance:	5 gn (f=12....500 Hz) conforming to IEC 60068-2-6
Shock Resistance:	42 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27, 50 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27
IK degree of Protection:	IK05 conforming to IEC 50102
Degree of Protection:	IP66 conforming to IEC 60529, NEMA 4X, NEMA 13
Electric Service Life:	100,000 hours at rated voltage and at 25°C