



Main

Product or component type	Starter
Type	S
Control Circuit Type	Separate control circuit

Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Motor starter type	Non reversing
Current Rating	27 A
Number of Poles	3P
Number of Phases	3 phase
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Melting alloy 3
Electrical connection	Screw clamp terminals
NEMA size	1
Maximum Height	6.77 in (172 mm)
Maximum Depth	4.21 in (107 mm)
Maximum Width	3.50 in (89 mm)
Net Weight	3.97 lb(US) (1.8 kg)

Environment

Enclosure Type	Not rated (open device)
Product certifications	NEMA UL Listed CSA

Ordering and shipping details

Category	21192 - 8502,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901845119
Nbr. of units in pkg.	1
Package weight(Lbs)	4.3 lb(US) (1.95 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.70 in (14.478 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	8.00 in (20.32 cm)

Offer Sustainability


EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS Declaration
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions and Clearance

Electrical Clearance / Wire Bending Space

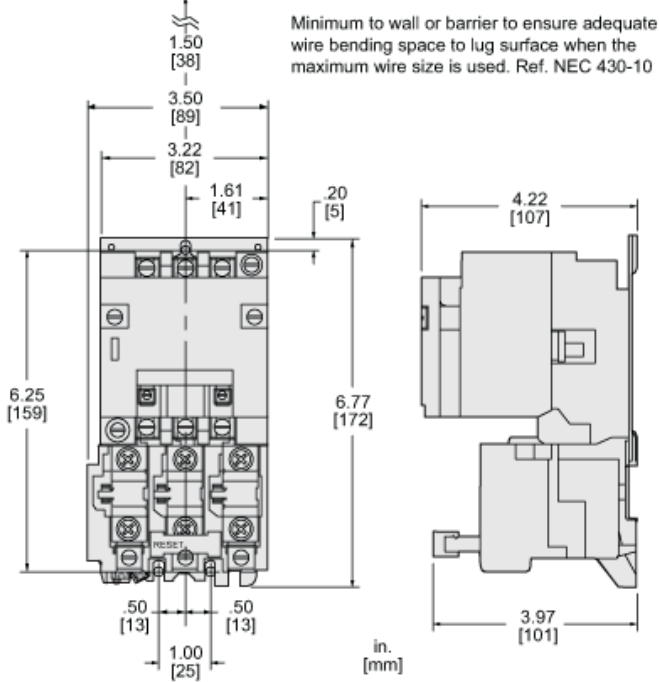

NEMA SIZE 1 STARTER
3-Pole Polyphase 600 VAC. 50-60 HZ

Coil Voltage Code (*)	Voltage	
	60 HZ	50 HZ
V01	24	—
V02	120	110
V08	208	—
V03	240	220
V06	480	440
V07	600	550
V99	Specify	Specify

Catalog Number: 8536SCO3(*)
 Weight: 5 LB
 Wire Size: Power: #14-#8
 Control: #16-#12
 Terminal Torque: 20 LB/IN
 Mounting Hwd. (3) #10 Screws