


CABLE MECHANISMS FOR USE WITH CLASS 9422
TYPE NSF 4 POLE CIRCUIT BREAKER.

TYPE	CABLE LENGTH	MAXIMUM BOX DEPTH	MAXIMUM DISTANCE FROM TOP RIGHT MOUNTING HOLE TO UPPER MOUNTING HOLE FOR HANDLE OPERATOR (DIM C)	
			MINIMUM C	MAXIMUM C
CSF304	36"	24"	3.50"	7"
CSF504	60"	36"	16"	24"
CSF104	120"	36"	4 FEET	5 FEET

REFER TO NEC ARTICLE 430-10 FOR MINIMUM DIMENSION X FROM CIRCUIT BREAKER TOP MOUNTING HOLE TO WALL OR BARRIER TO ENSURE ADEQUATE WIRE BENDING SPACE.

NOTE: LEFT HAND MOUNTING AVAILABLE

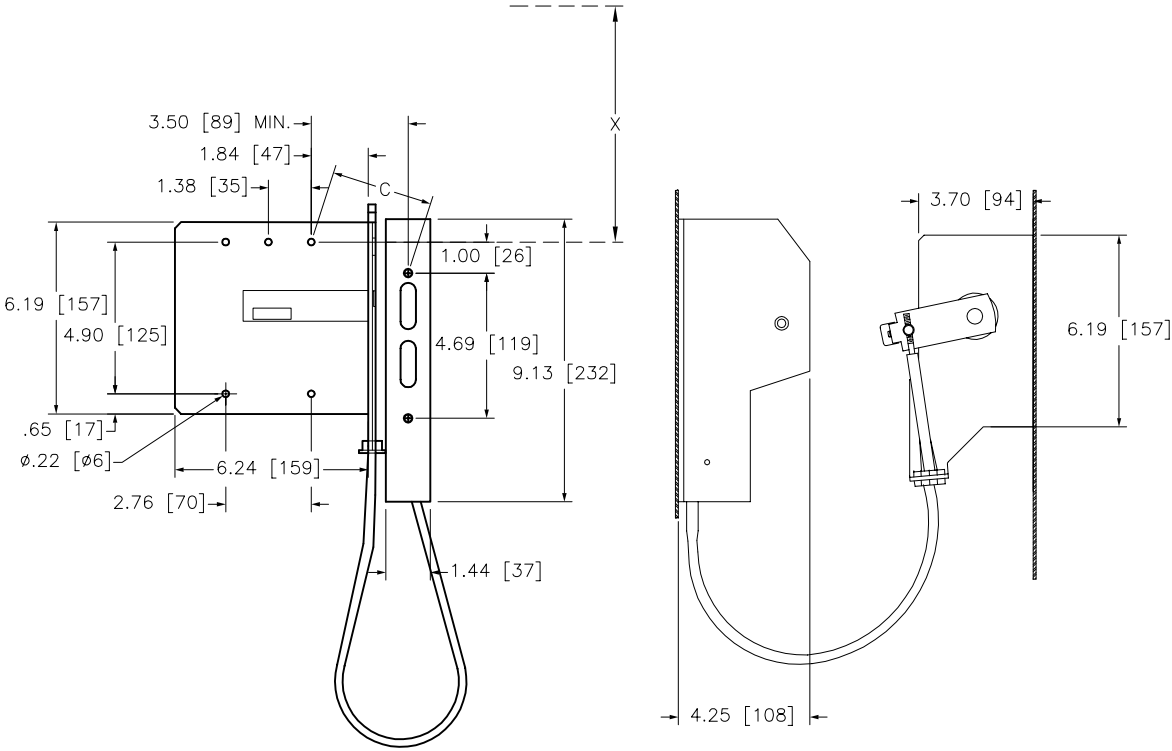

NOTE: BEND RADIUS IN CABLE MUST NEVER BE LESS THAN 6 INCHES.
ELECTRICAL CLEARANCES MUST BE MAINTAINED BETWEEN CABLE AND LIVE ELECTRICAL PARTS.

Catalog Number: 9422-CSF304, CSF504, CSF104
Ratings: -
UL File/CCN: E62922/DIHS2
CSA File/Class: -
Meets Standards: -
Weight: 7.5 lbs
Wire Size: -
Terminal torque: -
Mounting Hwd: (5) #8-32 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION
TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS ± .01

4 POLE CIRCUIT BREAKER
CABLE OPERATOR MECHANISM
CLASS 9422 TYPE CSF304, CSF504, CSF104

 **SQUARE D COMPANY**

DWG# 9422_CSF_OUTLINE_002
NO.