


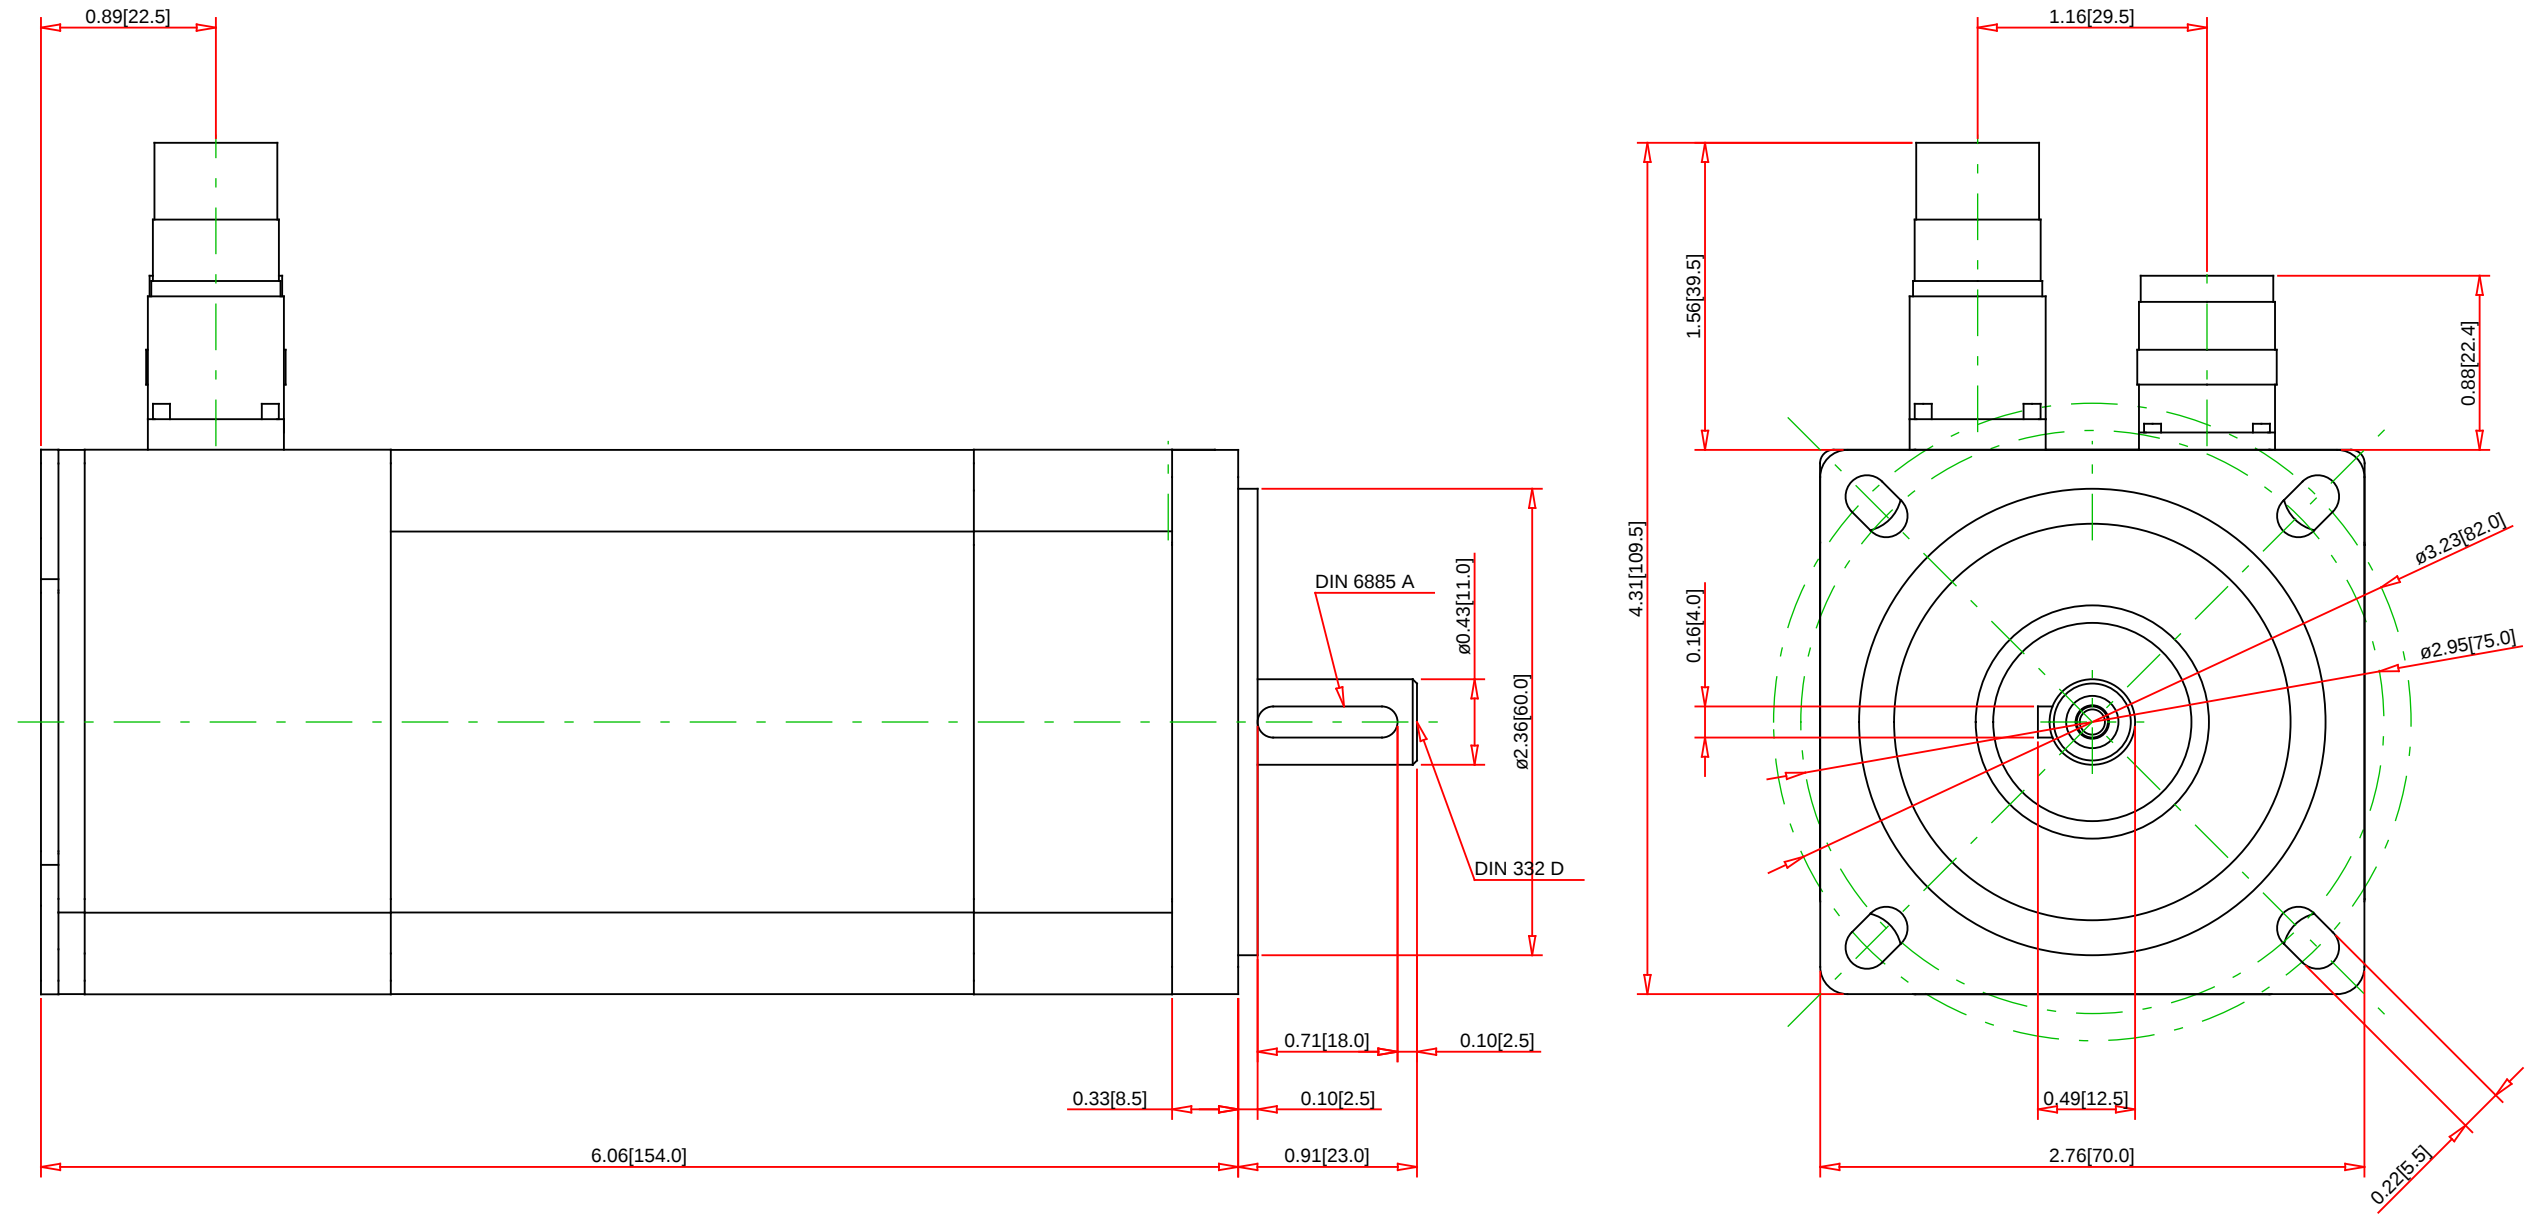

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMH0702T21A1A

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:	
Frame Size (mm):	70
Degree of Protection (Shaft / housing):	IP65 / I P65
Maximum Current (Arms):	17.71
Holding brake:	No
Encoder Type:	ABS Single turn 128 Sin/Cos period
Torque Constant (Nm/A)	0.46
CSA:	Yes
RoHS:	Yes
Weight without brake (kg / lb):	5.07 / 2.3

Specification:	
Description:	
Family:	BMH
Maximum Permissible Speed (rpm):	8000
Continuous Stall Torque (Nm / lbs-in):	2.48 / 21.9
Peak Torque (Nm / lbs-in):	7.44 / 65.85