

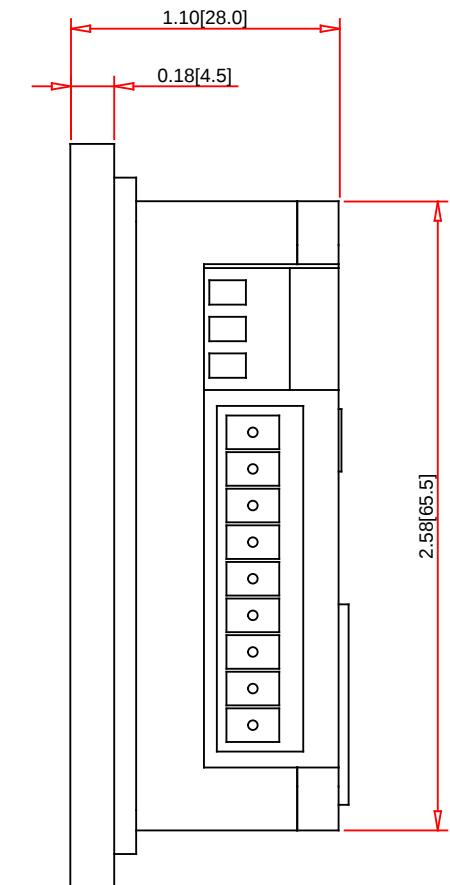
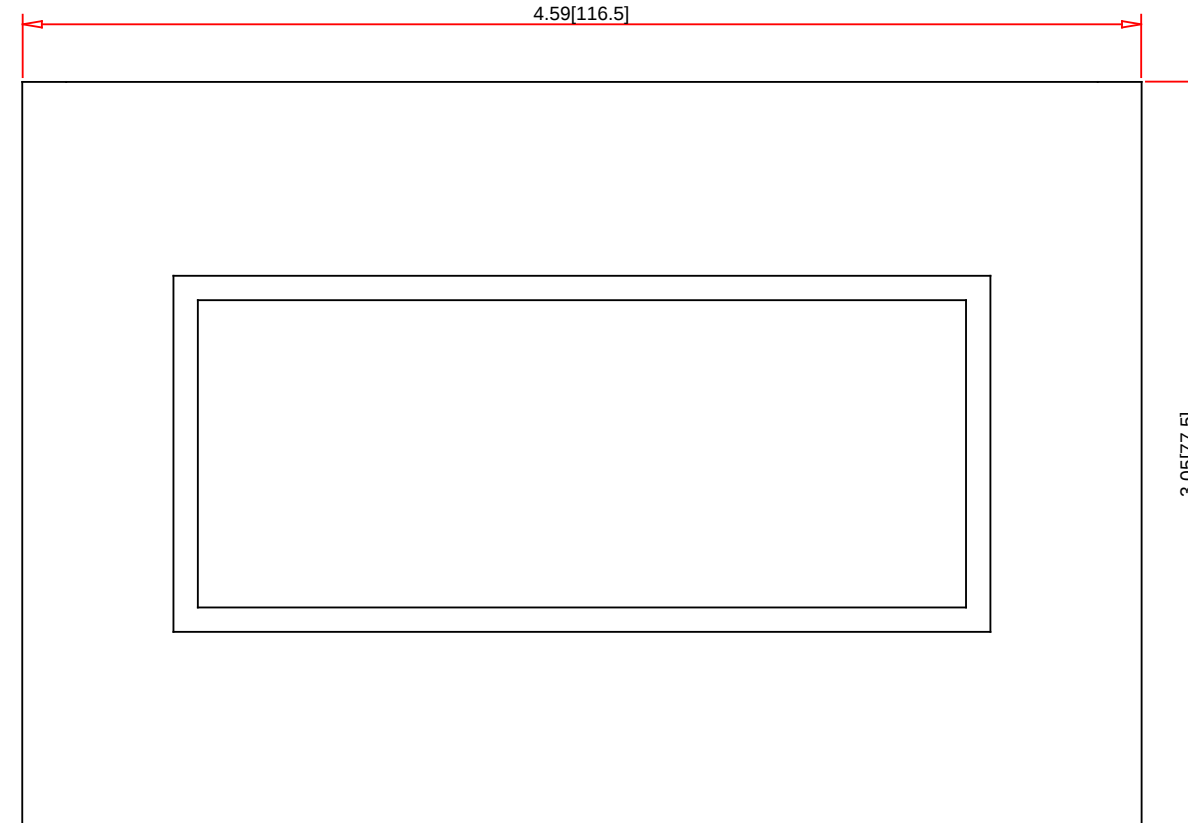
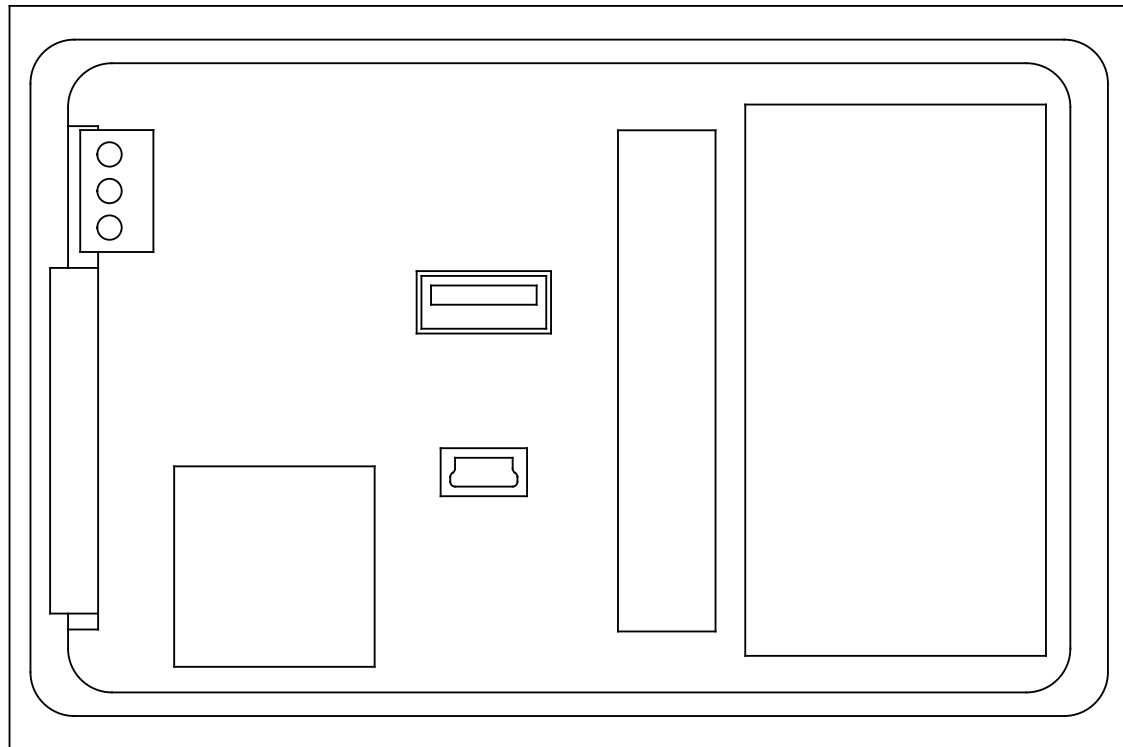


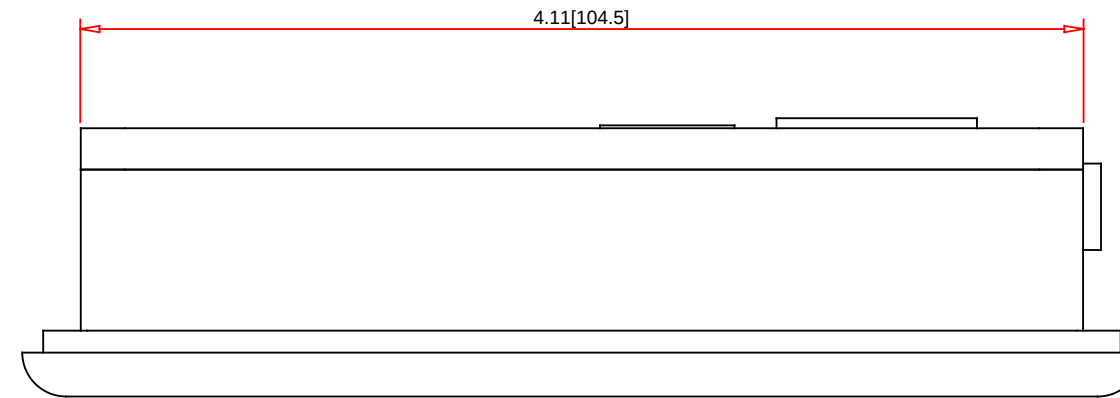

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

HMISTO501

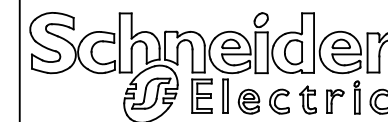

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL Certifications:	UL/c-UL Listed, (UL508)
CSA Certifications:	CSA-C22.2 No.142-M1987
ANSI/ISA Certifications:	ANSI/ISA 12.12.01
CE Markings:	CE EN61000-6-2, EN61000-6-4, EN61131-2
WEEE 2002/96/EC:	Yes
RoHS 2002/95/EC:	Yes
RoHS China SJ/T 11363-2006:	Yes
Common Automation Protocols:	Modbus, Uni-TE, FIPWAY, FIPIO, Modbus Plus
Other Protocols:	PacDrive, Siemens, Omron, Mitsubishi, Rockwell
Operating Temperature Range:	0°C (32°F) to 50°C (122°F)
Storage Temperature Range:	-20 to 60 °C [-4 to 140 °F]
Relative Humidity"	0 to 90% non-condensing

Specification:

Description:	
Screen Type:	Green/Orange/Red LCD
Resolution:	200x80 Pixels
Interface Ports:	RS-232C, RS-485 RJ45
Enclosure Rating:	IP65, NEMA4x
USB Ports:	1 Type-A and 1 mini-B
RAM:	128kB Data backup Flash (no battery)
Storage:	16MB App Flash, 32 App DRAM
Supply Voltage:	24VDC ± 4.8