


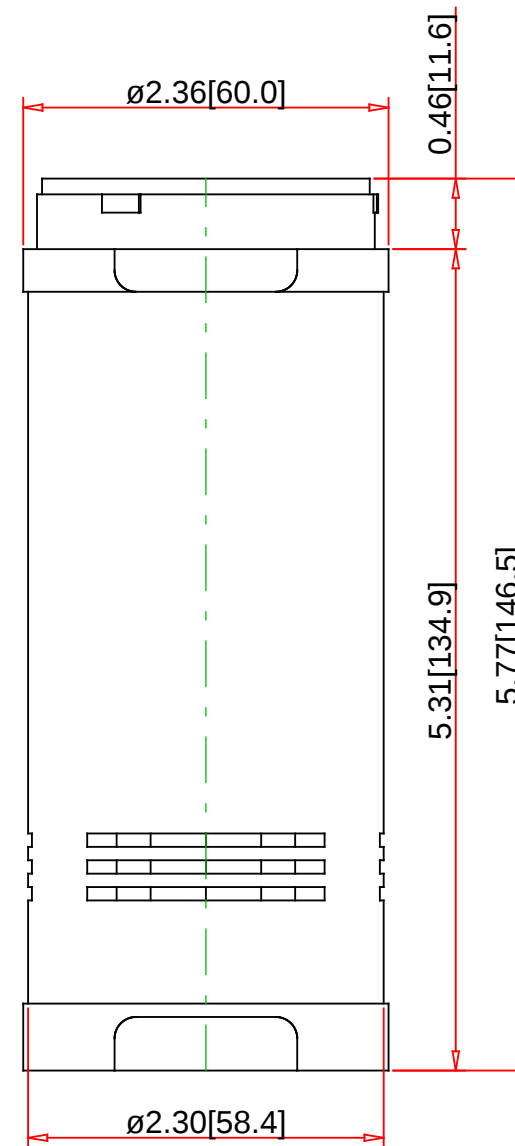


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XVUC9VP

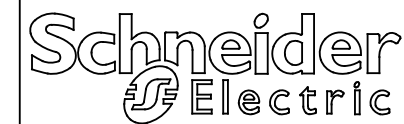

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Agency Approvals: UL, CSA, CE, RoHS
Ingress Protection: IP 54
Rated Voltage: 24V AC/DC
Power Consumption: 190 mA Max.
Sound Level : 86dB(at 1m)
Frequency of Buzzer:
Color of Lights:
Light Source:
Frequency of Flashing Lights:
El. Shock Res. EN/IEC 61140:
Storage Temperature: -40~+70°C
Operating Temperature: -25~+50°C

Specification:

Description: 60mm Tower Pulse Signal Voice Module
Material - Lens Unit:
Material - closure plate: PC(UL94 V-0)
Material - Body: PBT + ABS(UL94 V-0)
Material - Pole:
Material -terminal cover: