


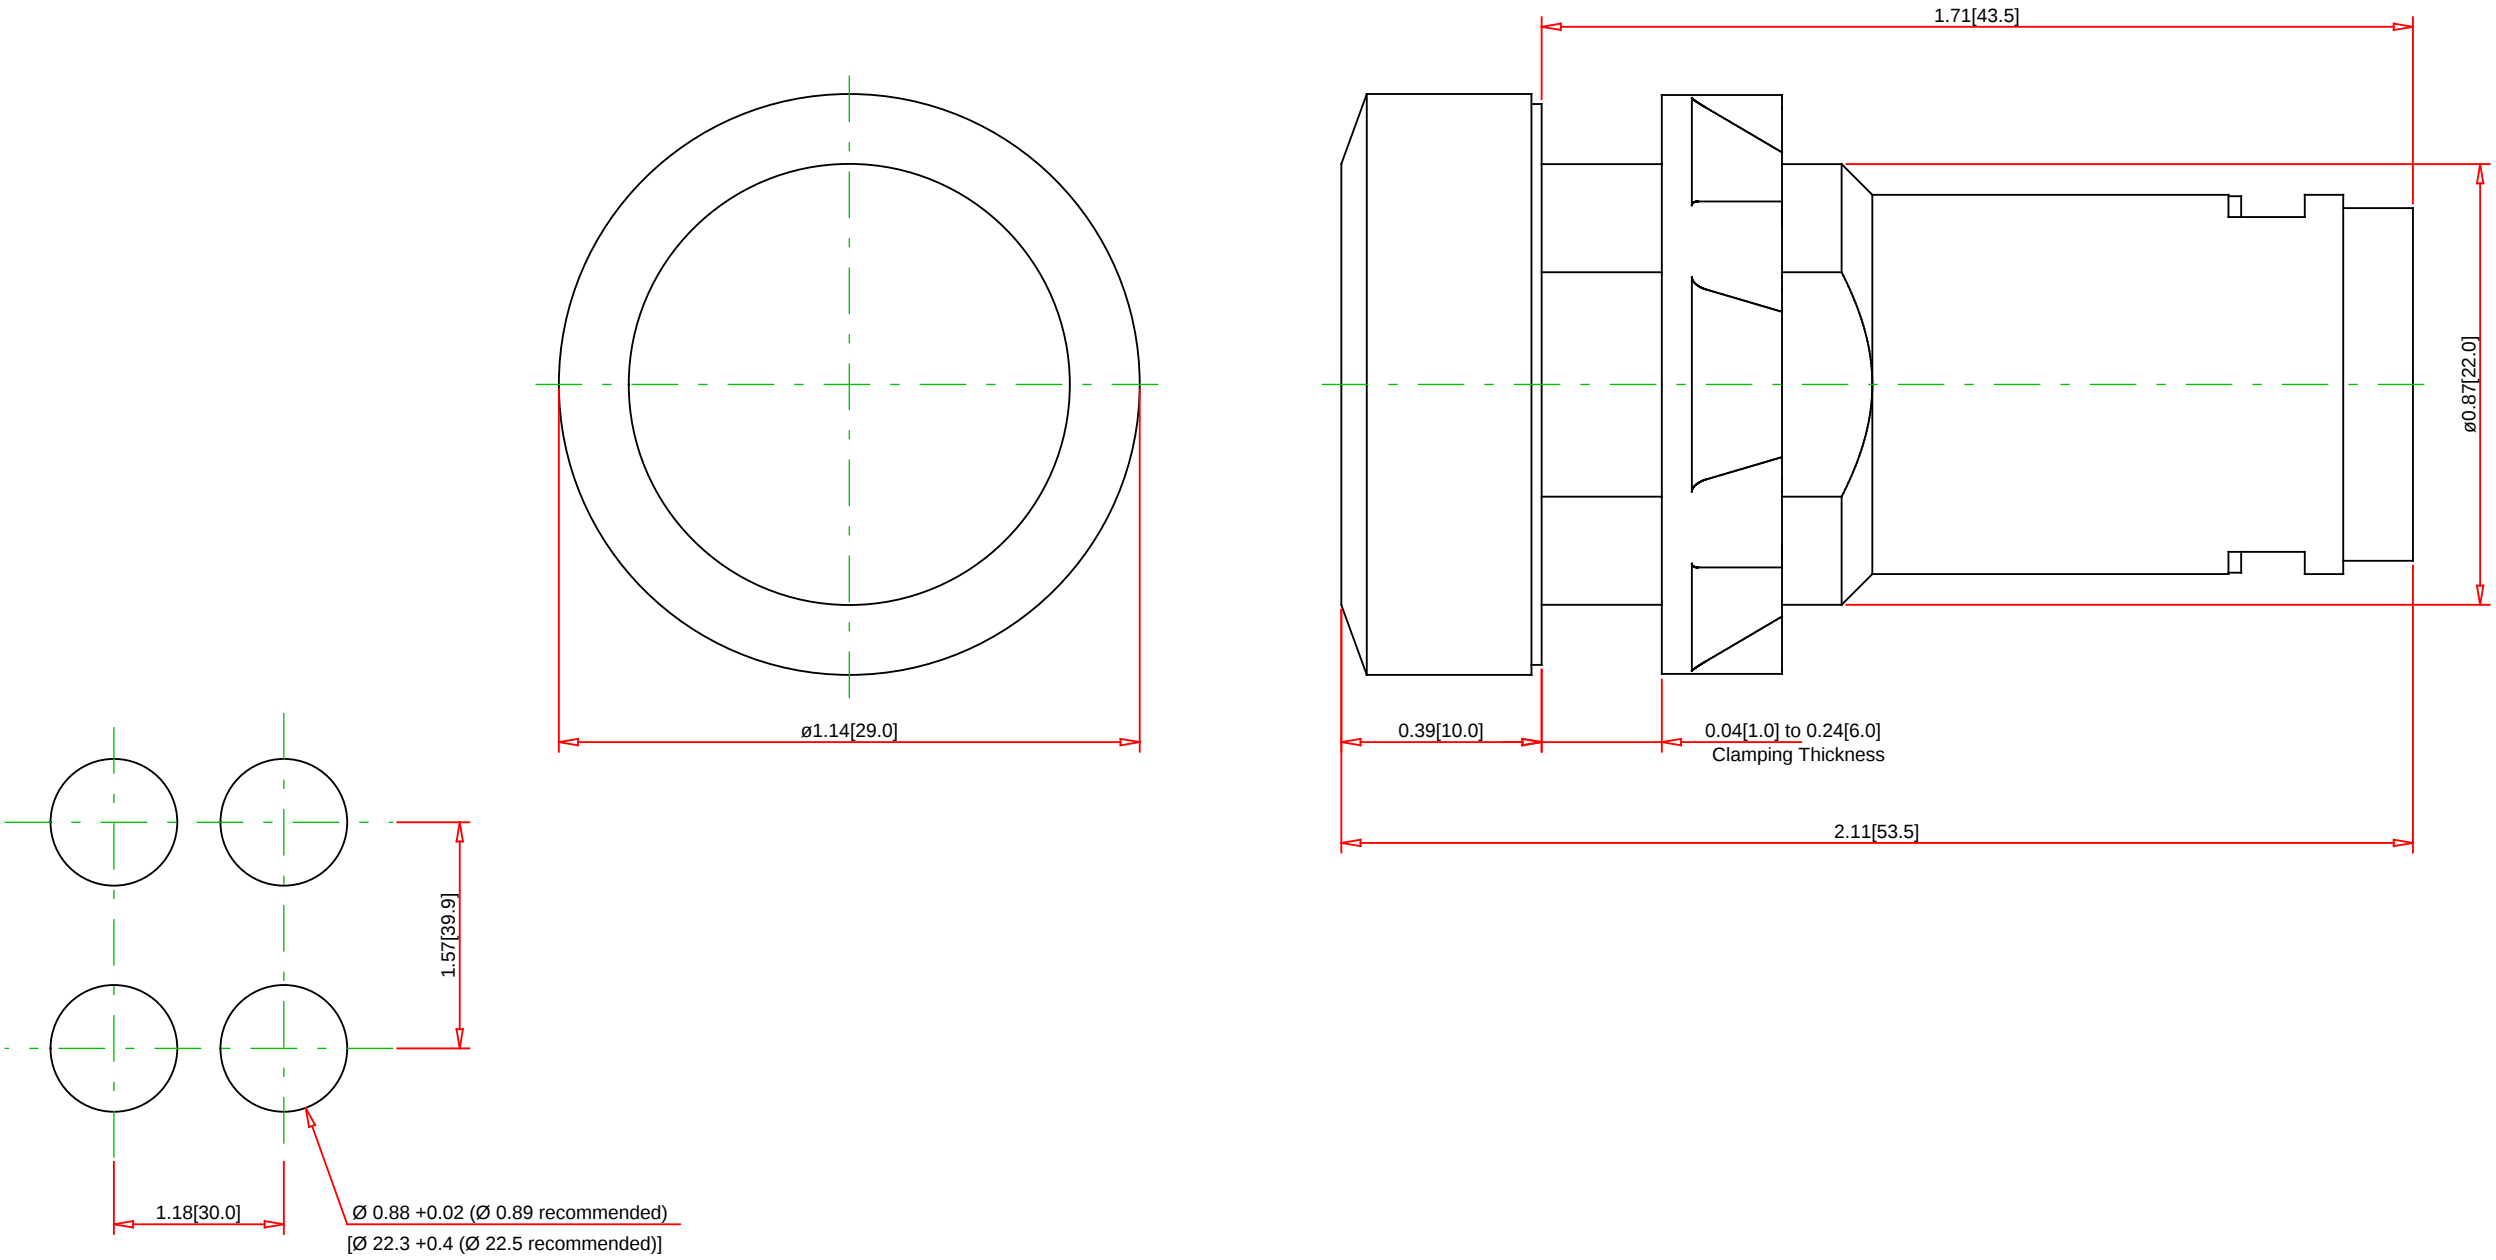

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]		Part No.: XB5EVB5		Schneider Electric Schneider Electric United States North American Division Boston One Campus 800 Federal Street Andover, MA 01810, USA Phone:+1 8773425173 Email: CCC@us.schneider-electric.com	
Technical Information: Supply Voltage (Input): 24VAC/DC, 50/60 Hz Supply Voltage Limits: 21.6-26.4 VAC 19.2-30 VDC Current Rating: 18mA Surge Withsand: 1 kV conforming to IEC 61000-4-5 Bulb Type: Protected and Integrated LED Ambient Air Temp. (for storage): -40°C to 70°C Ambient Air Temp. (for operation): -25°C to 70°C Conformity to Standards: EN/IEC 60947-1, EN/IEC 60947-5-1, UL508, CSA C22-2 n°14, IEC 61000-4-2, IEC 61000-4-3, IEC 6100-4-4, UL, FCC, CSA, CE				Specification: Description: 22mm Monolithic Pilot light, complete, 24V, Orange Vibration Resistance: 5 gn (f=12....500 Hz) conforming to IEC 60068-2-6 Shock Resistance: 33 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27, 50 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 IK degree of Protection: IK05 conforming to IEC 50102 Degree of Protection: IP66 conforming to IEC 60529, NEMA 4X, NEMA 13 Electric Service Life: 100,000 hours at rated voltage and at 25°C	