



Main

Range of product	Harmony iPC
Product or component type	Modular box PC
Device short name	Modular BOX PC basic Optimized
Operating system	Windows 10 IoT Enterprise 64 bit multi-language
Software package	Node-RED and system nodes restore IIoT Wiring Operating System Restore McAfee white listing installer cyber security license not included EcoStruxure secure connect advisor annual subscription cyber security license not included EcoStruxure Operator Terminal Expert run time HMI license not included EcoStruxure machine SCADA expert run time HMI/SCADA on configured offer only EcoStruxure augmented operator advisor server augmented operator license not included

Complementary

Range compatibility	IDisplay Modular Display HMIDM
Accessory / separate part destination	PC panel HMIDM modular display
Mounting location	Book mounting Flat mounting Wall mounting
Processor name	Intel Atom E3930
Data storage equipment	64 GB eMMC (soldered)
Memory description	4 GB RAM DDR3 internal not expandable)
Number of slots	1 mini PCI Express full-size
Display resolution	3200 x 2000 pixels at 60 Hz
Watchdog timer	1...255 ms
Type of cooling	Fanless
Electrical connection	Screw connector pin, 1 way ground bottom Connector SMA, 3 ways top
Integrated connection type	Display port 1 front Ethernet 2 RJ45 Realtek 8111G 10/100/1000 Mbps bottom IEEE 1588 not supported COM1 serial link battery backup 1 male SUB-D 9 RS232/422/485 bottom non-isolated USB 2.0 port 1.0 USB type A 480 Mbit/s bottom USB 3.0 port 1.0 USB type A 5 Gbit/s bottom TPM connector Ver 2.0 cyber security - hardware encryption TPM module HMIYMINATPM201 to be installed/default installed motherboard
Cyber secured boot	Secure password boot UEFI
[Us] rated supply voltage	24 V DC power supply 100...240 V AC power supply
Supply voltage limits	9.6...28.8 V
Inrush current	2.03 A
Power consumption in W	20.0 W box) 15.0 W with 4:3 12" Display HMIDM6421) 16.0 W with Wide 12" Display HMIDM6521) 17.0 W with 4:3 15" Display HMIDM7421) 19.0 W with Wide 15" Display HMIDM7521) 20.0 W with Wide 19" Display HMIDM9521) 21.0 W with Wide 22" Display HMIDMA521)
Control type	ON/OFF button
Maximum Depth	1.81 in (46 mm)

Maximum Height	5.91 in (150 mm)
Maximum Width	7.36 in (187 mm)
Net Weight	2.65 lb(US) (1.2 kg)
Number of slots available for expansion	1.0 mini PCIe

Environment

Standards	Class A group 1 EN 55011 EN 61000-6-4 EN 61131-2 FCC part 15 UL 60950
Product certifications	CE CULus UL 60950 for IT equipments EAC CCC RCM
Quality labels	CE
Directives	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
IP degree of protection	IP40 IEC 60529
Electromagnetic compatibility	Immunity to high frequency interference IEC 61000-4 Disturbing field emissionclass A EN 55011 Conducted and radiated emissionsclass A EN 55022
Ambient air temperature for storage	-4...140 °F (-20...60 °C) IEC 60068-2-2 -4...140 °F (-20...60 °C) IEC 60068-2-14
Relative humidity	10...95 % non-condensing EN/IEC 60068-2-30
Ambient air temperature for operation	32...122 °F (0...50 °C) by default) EN/IEC 60068-2-2 32...122 °F (0...50 °C) flat mounting 32...113 °F (0...45 °C)mini PCIe 32...113 °F (0...45 °C) flat mountingmini PCIe
Operating altitude	6561.68 ft (2000 m) EN/IEC 60664-1
Vibration resistance	2 gn 5...500 Hz)eMMC


Ordering and shipping details

Category	"22577 - EDGE BOX IPC
Discount Schedule	MC2
GTIN	03606481245762
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	Yes
Country of origin	TW


Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.31 in (8.4 cm)
Package 1 width	8.66 in (22 cm)
Package 1 Length	12.80 in (32.5 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	23.59 lb(US) (10.7 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)

Dimensions

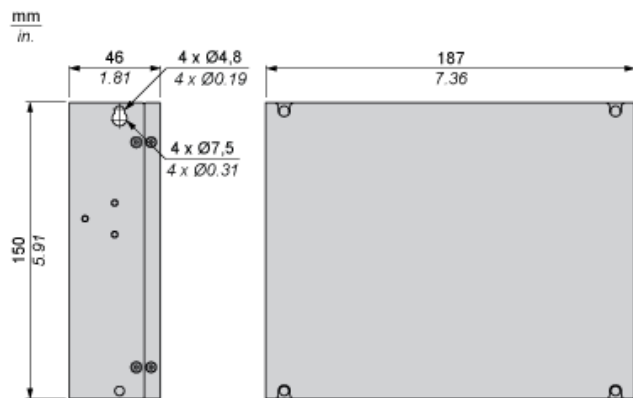

Spacing Requirements

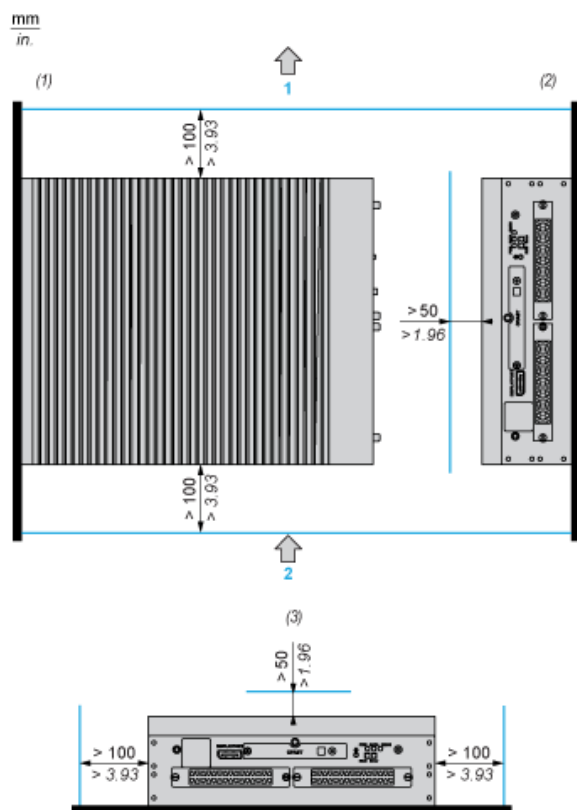

- 1 : Air out
2 : Air in
(1) Book mounting : Vertical mounting with rear fixing
(2) Wall mounting : Vertical mounting with side fixing
(3) Horizontal mounting