



Main

| | |
|---------------------------|----------------------------------|
| Range of product | Harmony XVR |
| Product or component type | Prewired rotating mirror beacon |
| Sound signalling | Without |
| Device short name | XVR |
| Mounting diameter | 5.12 in (130 mm) |
| IP degree of protection | IP66 IEC 60529 IP67 IEC 60529 |
| [Us] rated supply voltage | 24 V AC/DC |
| Light source | High luminosity LED, red |

Complementary

| | |
|--|---|
| Material | ABS (acrylonitrile butadiene-styrene) body part PC globe |
| CAD overall width | 5.12 in (130 mm) |
| CAD overall depth | 5.12 in (130 mm) |
| Net Weight | 1.81 lb(US) (0.82 kg) |
| Marking | CE |
| Product mounting | By 3 M6 screws |
| [Uimp] rated impulse withstand voltage | 0.8 kV |
| Current consumption | 125 mA |
| Flashing frequency | 2.7 Hz |
| Clamping connection capacity | 1.25 mm ² |
| AWG gauge | AWG 18 |
| Cable length | 15.75 in (400 mm) |

Environment

| | |
|---------------------------------------|--------------------------------------|
| Standards | EN/IEC 61000-6-2 EN/IEC 61000-6-4 |
| Protective treatment | TC |
| Ambient air temperature for storage | -31...158 °F (-35...70 °C) |
| Ambient air temperature for operation | -22...122 °F (-30...50 °C) |
| Electrical shock protection class | Class II IEC 61140 |

Ordering and shipping details

| | |
|-----------------------|--------------------------|
| Category | 22617 - XVC TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 00785901944805 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.49 lb(US) (1.13 kg) |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|-------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 10.43 in (26.5 cm) |
| Package 1 width | 7.36 in (18.7 cm) |
| Package 1 Length | 7.40 in (18.8 cm) |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 6 |
| Package 2 Weight | 17.63 lb(US) (7.996 kg) |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 width | 15.75 in (40 cm) |
| Package 2 Length | 23.62 in (60 cm) |

Offer Sustainability


| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Rotating Mirror Beacon

Dimensions

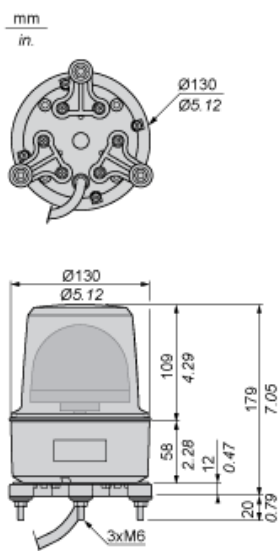

Rotating Mirror Beacon

Panel Cut-out

