

BRACKET MOUNTED OPERATING MECHANISM FOR USE WITH LAL, LHL OR Q4L CIRCUIT BREAKERS.

WIRE SIZE	DIMENSION X
1 #1-600 Kcmil	
1 #1-250 Kcmil	14.00 [356]
1-500-750 Kcmil	20.37 [517]
1 #1-600 Kcmil CU	1400 [756]
2 #1-250 Kcmil CU	14.00 [356]

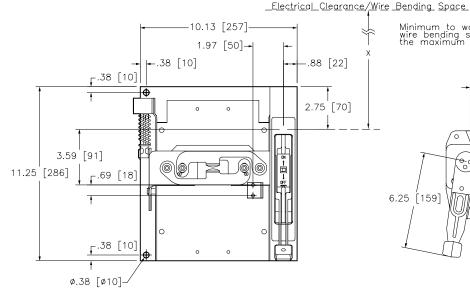

Minimum to wall or barrier to insure adequate wire bending space to lug surface when the maximum wire size is used. REF. NEC 430-10



MINIMUM ENCLOSURE DEPTH 10.00 [254]

Catalog Number: 9422-BR1

Ratings

E65955\DIH25

UL File/CCN: CSA File/Class: -

Meets Standards+

Weight: 19.58 lbs

Wire Size: SEE CHART

Terminal torque:-

Mounting Hwd. (2) 5/16-18 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

THIRD ANGLE TOLERANCES DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED

2 PLACE DECIMALS ± .01

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

BRACKET MOUNTED OPERATING MECHANISM CLASS 9422 TYPE BR1



DWG# 9422_BR_OUTLINE_001

FEBRUARY 2001

E0105301