

## Product data sheet

### Characteristics

## XVC6B2

Monolithic tower light, red-orange, 60mm, tube mounting, steady, without buzzer, IP23, 24 V  
AC DC



### Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Sound signalling	Without
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady red LED steady orange
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover STK (chromium-plated) support tube
Product mounting	On support tube, 22 mm
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22
Cable length	23.62 in (600 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	50 mA
Flashing frequency	1 Hz
Net Weight	1.63 lb(US) (0.74 kg)
Maximum Height	18.44 in (468.3 mm)

### Environment

Standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3 EN/IEC 61000-6-4
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class I EN/IEC 61140
IP degree of protection	IP23 vertical surface installation EN/IEC 60529

### Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901670773
Nbr. of units in pkg.	1
Package weight(Lbs)	2.18 lb(US) (0.99 kg)

Returnability	No
Country of origin	ID

## Packing Units

Package 1 Height	0.880 dm
Package 1 width	7.720 dm
Package 1 Length	0.850 dm

## Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

## Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

## Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

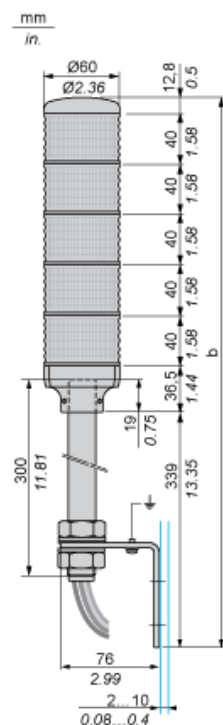

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	428.3	16.86
2 stages	468.3	18.44
3 stages	508.3	20.01
4 stages	548.3	20.01
5 stages	588.3	23.16

---

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

