
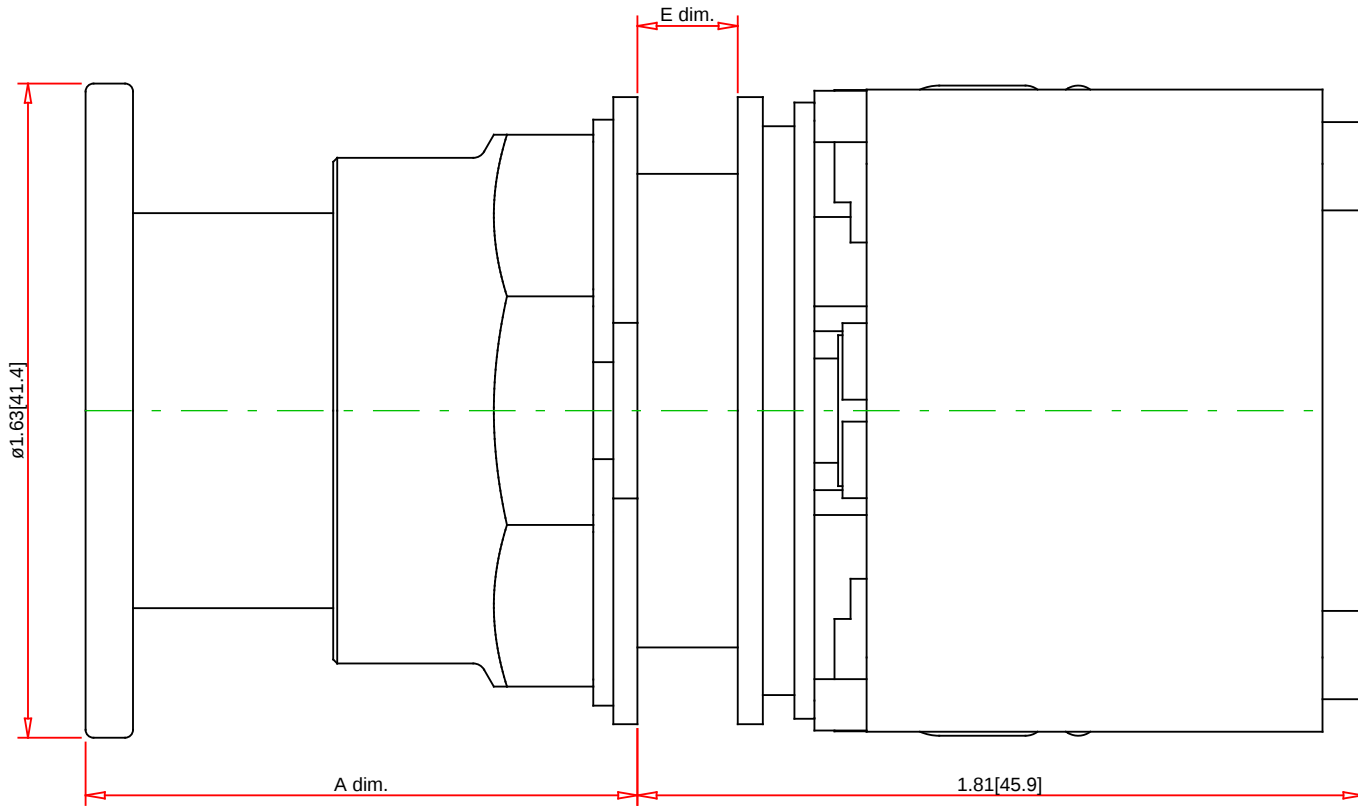


| Panel Thickness<br>E dim.<br>inches (mm) | Number<br>of<br>Gasket |
|------------------------------------------|------------------------|
| 1/16 (1.6)                               | 4                      |
| 1/8 (3.2)                                | 3                      |
| 3/16 (4.8)                               | 2                      |
| 1/4 (6.4)                                | 1                      |

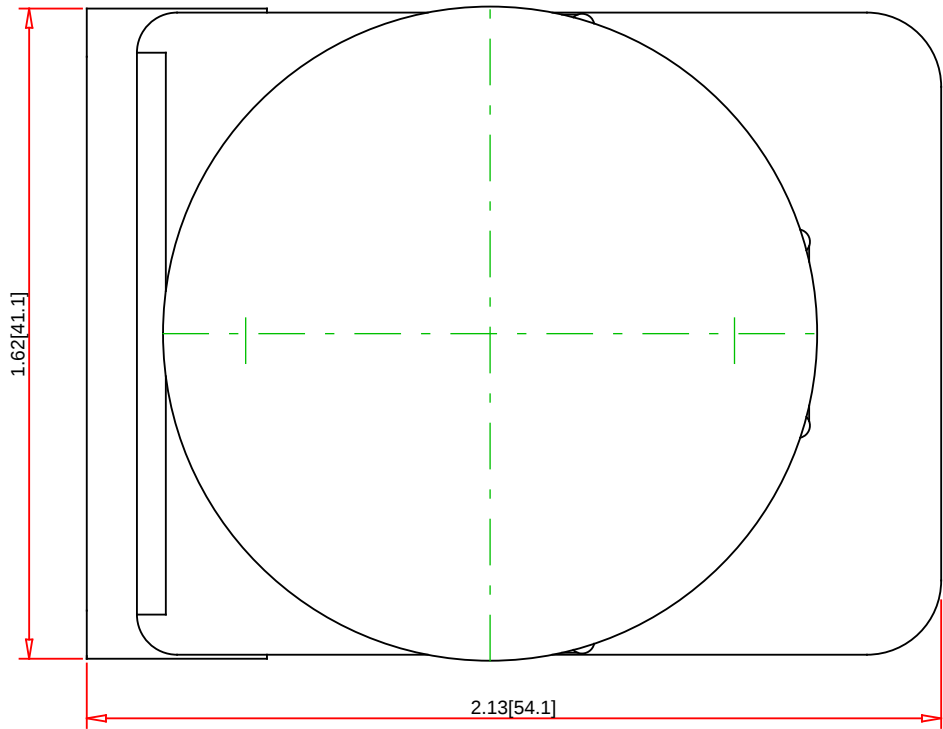

| A dim. inches (mm)  |                     |                     |
|---------------------|---------------------|---------------------|
| Depressed<br>(Stop) | Midway<br>(Neutral) | Extended<br>(Start) |
| 1 3/8(34.9)         | 1 9/16 (39.7)       | 1 3/4 (44.5)        |

Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:  
**9001KR8P1L**

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone:+1 8773425173  
Email: CCC@us.schneider-electric.com

| Technical Information:       |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| UL File:                     | E78403 CCN NKCR                                                                      |
| CSA File:                    | LR24590 Class 3211-03                                                                |
| CE Marked:                   | Yes                                                                                  |
| RoHS:                        | Yes                                                                                  |
| NEMA / IP Rating:            | NEMA 1/2/3/3R/4/6/12/13 Water tight, Dust tight and Oil tight (Indoor/Outdoor), IP66 |
| Key Number:                  | n/a                                                                                  |
| Key Removal:                 | n/a                                                                                  |
| Light Module Supply Voltage: | 110/120VACat50/60Hz                                                                  |
| Light Module Type:           | Transformer                                                                          |
| Number of Operators:         | 1                                                                                    |

| Specification:       |                                              |
|----------------------|----------------------------------------------|
| Description:         | 30mm Push Button                             |
| Ring Nut Material:   | Chromium Plated Zinc                         |
| Operator Type:       | Illuminated                                  |
| Operator Action:     | Momentary (Push/Pull) - Maintained (Neutral) |
| Button Type:         | Screw-On Plastic Mushroom (1.63 Inch/41mm)   |
| Guard Type:          | No Guard                                     |
| Button/Cap Color:    | Blue                                         |
| Lens Type:           | not applicable                               |
| Lens Color:          | not applicable                               |
| Knob Type:           | not applicable                               |
| Knob Color:          | n/a                                          |
| Number of Positions: | 3                                            |